

BOX PATENT
APPLICATION



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Attorney Docket No. LAMA114504

TRANSMITTAL LETTER

Seattle, Washington 98101

October 6, 1999



TO THE ASSISTANT COMMISSIONER FOR PATENTS:

Transmitted herewith for filing under 37 C.F.R. § 1.53(b) by Express Mail is the

 X a. complete

patent application of: Fred Harmat and Graeme Van Dongen,

Title: METHOD AND APPARATUS FOR CIRCUMFERENTIAL APPLICATION OF
MATERIALS TO AN INTERIOR SURFACE OF A CURVED PIPE

Executed On: September 20, 1999

- X 1. An application consisting of 21 pages of specification and claims and 21 sheets of formal drawings is attached.
- X 2. A newly executed Declaration and Power of Attorney is attached.
- X 3. An Assignment of the invention to Almac Machine Works Ltd. is attached. A Cover Sheet prepared in accordance with 37 C.F.R. § 3.31 is attached to the Assignment. Please record this Assignment in accordance with 37 C.F.R. § 3.11.
- X 4. A filing date in accordance with 37 C.F.R. § 1.10 is requested. The Express Mail Certificate appears below.
- X 5. Two (2) Small Entity Statements are attached.

///

///

///

LAW OFFICES OF
CHRISTENSEN O'CONNOR JOHNSON & KINDNESS^{PLLC}
1420 Fifth Avenue
Suite 2800
Seattle, Washington 98101
(206) 682-8100

COMPUTATION OF FEE

	Number Filed		Number Extra		Rate		Basic Rate \$380.00
Total Claims	28 - 20	=	8	x	\$9	=	\$72.00
Independent Claims	6 - 3	=	3	x	\$39	=	\$117.00
Multiple Dependent Claims	0		---		--	=	\$0
TOTAL							\$569.00

- X 6. Our check No. **109782** in the amount of **\$569.00** to cover the total fee as computed above is enclosed.
- X 7. The Commissioner is hereby authorized to charge any fees under 37 C.F.R. §§ 1.16, 1.17 and 1.18 which may be required during the entire pendency of the application, or credit any overpayment, to Deposit Account No. 03-1740. This authorization also hereby includes a request for any extensions of time of the appropriate length required upon the filing of any reply during the entire prosecution of this application. A copy of this sheet is enclosed.

Please address all further correspondence to:


CHRISTENSEN O'CONNOR JOHNSON & KINDNESS^{PLLC}

1420 Fifth Avenue

Suite 2800

Seattle, WA 98101

Respectfully submitted,
CHRISTENSEN O'CONNOR
JOHNSON & KINDNESS^{PLLC}



Marcia S. Kelbon
Registration No. 34,358
Direct Dial (206) 695-1720

EXPRESS MAIL CERTIFICATE

"Express Mail" mailing label number EM523798905US

Date of Deposit October 6, 1999

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. § 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

Jeff Hubbard
(Typed or printed name of person mailing paper or fee)

Jeffery L. Hubbard
(Signature of person mailing paper or fee)

MSK:vmj

LAW OFFICES OF
CHRISTENSEN O'CONNOR JOHNSON & KINDNESS^{PLLC}
1420 Fifth Avenue
Suite 2800
Seattle, Washington 98101
(206) 682-8100

Applicant or Patentee:
Attorney's Docket No.:
Serial or Patent No:
Filed or Issued:
For:

VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY
STATUS (37 CFR 1.9((f) and 1.27 (b)) - INDEPENDENT INVENTOR

As a below named inventor, I hereby declare that I qualify as an independent inventor as defined in 37 CFR 1.9(c) for purposes of paying reduced fees under Section 41(a) and (b) of Title 35, United States Code, to the Patent and Trademark Office with regard to the invention entitled **Method And Apparatus For Circumferential Application of Materials To An Interior Surface Of A Curved Pipe** described in

(xx) the specification filed herewith
() application serial no. , filed
() patent no. , issued

I have not assigned, granted, conveyed or licensed and am under no obligation under contract or law to assign, grant, convey or license, any rights in the invention to any person who could not be classified as an independent inventor under 37 CFR 1.9(c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern or organization to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below:

() no such person, concern, or organization
(xx) persons, concerns or organizations listed below*

*NOTE: Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27)

FULL NAME: **Almac Machine Works Ltd.**

ADDRESS: **9624 - 35 Avenue, Edmonton, Alberta, T6E 5S3, Canada**

() INDIVIDUAL (xx) SMALL BUSINESS CONCERN () NONPROFIT ORGANIZATION

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

Applicant or Patentee:
Attorney's Docket No.:
Serial or Patent No.:
Filed or Issued:
For:

VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(f) and 1.27(c)) - SMALL BUSINESS CONCERN

I hereby declare that I am

- ☐ the owner of the small business concern identified below:
- ☒ an official of the small business concern empowered to act on behalf of the concern identified below:

FULL NAME OF CONCERN: **Almac Machine Works Ltd.**

ADDRESS: **9624 - 35 Avenue, Edmonton, Alberta, T6E 5S3, Canada**

I hereby declare that the above identified small business concern qualifies as a small business concern as defined in 13 CFR 121.3-18, and reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees under section 41(a) and (b) of Title 35, United States Code, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention, entitled **Method And Apparatus For Circumferential Application of Materials To An Interior Surface Of A Curved Pipe** by inventors **Fred Harmat** and **Graeme Van Dongen** described in

- ☒ the specification filed herewith
- ☐ application serial no. , filed
- ☐ patent no. , issued

If the rights held by the above identified small business concern are not exclusive, each individual, concern or organization having rights to the invention is listed below* and no rights to the invention are held to any person, other than the inventor, who could not qualify as a small business concern under 37 CFR 1.9(d) or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e). *NOTE: Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR

Small Entity Declaration

2

1.27)

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

NAME OF PERSON SIGNING: **Rollin Donald Marcotte**

TITLE OF PERSON OTHER THAN OWNER: **President**

ADDRESS OF PERSON SIGNING: **11503 - 13 Avenue, Edmonton, Alberta, T6J 7A3, Canada**

SIGNATURE



DATE

SEPT 29, 1999

TITLE OF THE INVENTION:

Method And Apparatus For Circumferential Application Of
Materials To An Interior Surface Of A Curved Pipe

5 **NAME(S) OF INVENTOR(S):**

Fred Harmat

Graeme Van Dongen

FIELD OF THE INVENTION

10 The present invention relates to a method and an apparatus
for circumferential application of materials to an interior
surface of a curved pipe

BACKGROUND OF THE INVENTION

15 There are various applications in which a circumferential
application of materials to an interior surface of a pipe is
preferred. For example, circumferential welding of overlay
materials to an interior surface of a pipe is preferred, as
fluids tend to flow along longitudinal welds and accelerate
20 wear. It is relatively easy to circumferentially weld a
section of straight pipe. When the section of pipe is curved,
positioning a circumferential weld along the interior surface
of the pipe becomes extremely difficult.

25 At the present time there is no cost effective method for
positioning a circumferential weld along the interior surface
of a curved section of pipe. Welds are, therefore, positioned
longitudinally. In addition to accelerated wear, fit problems
have been encountered due to differences in shrinkage between
30 straight sections of pipe welded circumferentially and curved
sections of pipe welded longitudinally.

SUMMARY OF THE INVENTION

35 What is required is a method and an apparatus for
circumferential application of materials to an interior surface
of a curved pipe.

According to one aspect of the present invention there is provided a method for circumferential application of materials to an interior surface of a curved pipe which includes the following steps. A pipe support is provided with a rotational axis. A curved section of pipe is mounted to the pipe support. A arm supporting an applicator head is positioned within the curved section of pipe. The pipe support is rotated about the rotational axis, while coordinating movement of the arm to maintain the applicator head in a working position within the curved section of pipe.

Although beneficial results may be obtained through the method, as described above, even more beneficial results may be obtained when the further step is taken of varying the rotational speed of the pipe support to control the rate of application or deposition of materials being applied.

Although beneficial results may be obtained through the use of the method, as described above, even more beneficial results may be obtained when the further step is taken of oscillating the applicator head and varying the oscillating amplitude of the applicator head to compensate for differences in length of curvature of the pipe.

According to another aspect of the invention there is provided an apparatus for circumferential application of materials to an interior surface of a curved pipe which includes a base and a pipe support mounted to the base for rotation about a rotational axis. The pipe support has a cavity adapted to receive a curved section of pipe. An arm extends into the cavity of the pipe support. An applicator head is mounted to the arm. A rotational drive is provided which is adapted to rotate the pipe support about the rotational axis. A controller is provided which is adapted to coordinate movement of the arm with the rotational positioning of the pipe support.

Although beneficial results may be obtained through the use of the apparatus, as described above, even more beneficial results may be obtained when the controller also coordinates the position of the applicator head with the rotational positioning of the pipe support. There are various ways to control the position of the applicator head there will hereinafter be further described a linkage which extends through the arm to the applicator head. The flexible linkage is adapted to control orientation of the applicator head.

Although beneficial results may be obtained through the use of the apparatus, as described above, even more beneficial results may be obtained when the pipe support includes longitudinal guides and a guidance source adapted to move a curved section of pipe along the longitudinal guides. It is difficult to coordinate this movement with the pipe support rotating. There will hereinafter be described a longitudinal guidance source which applies a linear pulling force and longitudinal guides which provide an arcuate guide path to compensate for the curvature of the pipe.

Although beneficial results may be obtained through the apparatus, as described above, even more beneficial results may be obtained when the applicator head oscillates and the amplitude of oscillation is variable. This allows the applicator head to compensate for differences in the length of curvature of the pipe. There will hereinafter be further described an oscillation control mechanism in which such oscillations are controlled by a movable sensor oscillating between a pair of angularly offset rotating swash plates carried by the rotating pipe support. The movable sensor has a master to slave relationship with an oscillating drive for the applicator head.

BRIEF DESCRIPTION OF THE DRAWINGS

These and other features of the invention will become more apparent from the following description in which reference is

made to the appended drawings, wherein:

FIGURE 1 is a side view, in section, of an apparatus for circumferential application of materials to an interior surface of a curved pipe with a curved pipe in position to be mounted
5 onto the pipe support.

FIGURE 2 is a side view in section of the apparatus for circumferential application of materials to an interior surface of the curved pipe shown in **FIGURE 1**, with the curved pipe in position for starting circumferential welding of overlay
10 materials to the interior surface of the curved pipe.

FIGURE 3 is a side view in section of the apparatus for circumferential application of materials to the interior surface of the curved pipe shown in **FIGURE 1**, in the process of circumferential welding of overlay materials to an interior
15 surface of the curved pipe.

FIGURE 4 is a side view in section of the apparatus for circumferential application of materials to the interior surface of the curved pipe shown in **FIGURE 1**, at the completion of circumferential welding of overlay materials to an interior
20 surface of the curved pipe.

FIGURE 5 is an end view of the apparatus for circumferential application of materials to the interior surface of the curved pipe shown in **FIGURE 1**, with the welding head in position for starting circumferential welding of
25 overlay materials to the interior surface of the curved pipe as shown in **FIGURE 2**.

FIGURE 6 is an end view of the apparatus for circumferential application of materials to the interior surface of the curved pipe shown in **FIGURE 1**, with the welding
30 head welding overlay materials to the interior surface of the curved pipe and the pipe support having been rotated 45 degrees from the starting position shown in **FIGURE 5**.

FIGURE 7 is an end view of the apparatus for circumferential application of materials to the interior
35 surface of the curved pipe shown in **FIGURE 1**, with the welding head welding overlay materials to the interior surface of the curved pipe and the pipe support having been rotated 90 degrees

from the starting position shown in **FIGURE 5**.

FIGURE 8 is an end view of the apparatus for circumferential application of materials to the interior surface of the curved pipe shown in **FIGURE 1**, with the welding head welding overlay materials to the interior surface of the curved pipe and the pipe support having been rotated 135 degrees from the starting position shown in **FIGURE 5**.

FIGURE 9 is an end view of the apparatus for circumferential application of materials to the interior surface of the curved pipe shown in **FIGURE 1**, with the welding head welding overlay materials to the interior surface of the curved pipe and the pipe support having been rotated 180 degrees from the starting position shown in **FIGURE 5**.

FIGURE 10 is an end view of the apparatus for circumferential application of materials to the interior surface of the curved pipe shown in **FIGURE 1**, with the welding head welding overlay materials to the interior surface of the curved pipe and the pipe support having been rotated 225 degrees from the starting position shown in **FIGURE 5**.

FIGURE 11 is an end view of the apparatus for circumferential application of materials to the interior surface of the curved pipe shown in **FIGURE 1**, with the welding head welding overlay materials to the interior surface of the curved pipe and the pipe support having been rotated 270 degrees from the starting position shown in **FIGURE 5**.

FIGURE 12 is an end view of the apparatus for circumferential application of materials to the interior surface of the curved pipe shown in **FIGURE 1**, with the welding head welding overlay materials to the interior surface of the curved pipe and the pipe support having been rotated 315 degrees from the starting position shown in **FIGURE 5**.

FIGURE 13 is a detailed side elevation view, in section, of the arm illustrated in **FIGURE 1**.

FIGURE 14 is a detailed perspective view of the rotational drive for the pipe support illustrated in **FIGURE 1**.

FIGURE 15 is a detailed perspective view of the longitudinal guides illustrated in **FIGURE 1**.

FIGURE 16 is a detailed perspective view of the applicator head illustrated in **FIGURE 1**.

FIGURE 17 is a detailed perspective view of the longitudinal guidance system illustrated in **FIGURE 1**.

5 **FIGURE 18** is a detailed perspective view of movable members, engaged in the longitudinal guides and guided by the longitudinal guidance system.

FIGURE 19 is a perspective view of one of the movable members illustrated in **FIGURE 1**.

10 **FIGURE 20** is a detailed perspective view of a drive connection for the longitudinal guidance system illustrated in **FIGURE 18**.

FIGURE 21 is a detailed side elevation view, in section, of a control system for the oscillation of the applicator head, 15 with swash plates in a first rotational position.

FIGURE 22 is a detailed side elevation view, in section, of a control system for the oscillation of the applicator head, with swash plates in a second rotational position.

20 **DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT**

The preferred embodiment, an apparatus for circumferential application of materials to an interior surface of a curved pipe generally identified by reference numeral 10, will now be described with reference to **FIGURES 1** through **22**.

25

Referring to **FIGURE 1**, apparatus 10 includes a base 12 and a pipe support 14. Pipe support 14 has a first end 15, a second end 17, a cylindrical frame 16 and a central cavity 18 adapted to receive a curved section of pipe 20. Pipe 20 has 30 a first end 30, a second end 32 and an interior surface 50 defining an interior passage 52 of pipe 20. Pipe support 14 is mounted to base 12 for rotation about a rotational axis indicated by broken line 22. Opposed longitudinal guide tracks 24 are positioned along central cavity 18 of pipe support 14.

35 Referring to **FIGURE 15**, guide tracks 24 come as a removable assembly. A different guide track 24 is required for each differing curvature of pipe. The appropriate guide track 24

is installed in apparatus 10 prior to use. Referring to **FIGURE 1**, movable members having the form of collars 26 are secured to each of first end 30 and second end 32 of pipe 20. There are various ways to secure collars 26 to pipe 20. The manner used with the proto-type of apparatus 10 was by temporarily welding collars 26 to pipe 20. Referring to **FIGURE 19**, collars 26 are equipped with guide wheels 28 that engage opposed guide tracks 24 and have projecting guide pins 29. Referring to **FIGURE 1**, a guidance source 34 is adapted to move collars 26 along opposed guide tracks 24. Referring to **FIGURE 17**, guidance source 34 includes two telescopically expandable guide members 35 and two spaced pairs of parallel rails 37. Each of guide members 35 have guide wheels 39 which engage parallel rails 37. Telescopic expansion and contraction of guide members is governed by a drive screw 41. Referring to **FIGURE 20**, drive screw 41 is rotated by engaging it's remote end 43. Referring to **FIGURE 18**, each of guide members 35 have an attachment plate 45 with an opening 47. Referring to **FIGURE 18**, there is illustrated the inter-relationship between collars 26, guide tracks 24, and guidance source 34. Wheels 28 of collars 26 engage guide tracks 24. Pins 29 on one of collars 26, engages opening 47 on attachment plate 45 of guide members 35 of guidance source 34. A reversible drive motor 49 is provided which rotates a drive pulley 51 mounted at remote end 43 of one of drive screws 41. Drive pulley 51 is coupled by belts or chains 53 with an idler pulley 55 which, in turn is coupled to a drive pulley 51 for the other of drive screws 41. Through the described mechanism, drive motor 49 provides the force to rotate both drive screws 41. When drive motor 49 rotates drive screws 41 in a first direction guide members 35 expand. When drive motor 49 rotates in a second direction guide members 35 contract. Movement of guide members 35 is always in a linear direction with wheels 39 of guide members 35 engaging rails 37. In the proto-type pulley 55 was non-rotatably fixed to base frame 12. This enabled the rotation of pipe support 14 to impart rotation to pulleys 51 by means of belts or chains 53. This provided an advantage of enabling

drive screws 41 to cause guide members 35 to feed at a rate that was tied to the rotational speed of pipe support 14 and determined by the ratio of pulley 55 and pulleys 51 and the lead of drive screw 41. Variation of the feed rate could be
5 affected by changing the ratio of pulley 55 and pulleys 51 or by changing drive screw 41. In the proto-type, variation of this rate was achieved by selectively rotating drive motor 49. For example, when positioning the pipe on apparatus 10 in preparation for welding it proved to be considerably faster to
10 utilize drive motor 49 rather than rely upon rotation of pipe support 14. It must be remembered that while pipe support 14 rotates, guidance source 34 is only capable of providing a linear pulling force along rails 37. Longitudinal guide rails 24 provide an arcuate guide path which is selected to
15 compensate for the curvature of the pipe. Referring to **FIGURE 18**, opening 47 in attachment plate 45 is configured to compensate for the uniform angular feed of the pipe along its curvature, while utilizing the uniform linear feed of guide members 35. A different attachment plate 45 with a different
20 configuration of opening 47 is required for each different curvature of pipe.

Referring to **FIGURE 1**, an arm 36 extends into cavity 18 of pipe support 14. An applicator head, such as welding head
25 38 is pivotally mounted to a remote end 40 of arm 36. A rotational drive 42 is provided that is adapted to rotate pipe support 14 about rotational axis 22. Referring to **FIGURE 14**, rotational drive 42 includes a drive motor 61 which drives a pair of spaced driven sprockets 63. Drive motor 61 utilizes a
30 gear reduction unit 65. Drive motor 61 is coupled by a driven gear 67 and chain coupling 69 to driven sprockets 63. Driven sprockets 63, in turn, engage a gear sprocket 71 on pipe support 14 to impart a rotational force to pipe support 14. An exterior housing 73 for moveable arm 36 extends
35 eccentrically through gear sprocket 71. Exterior housing 73 moves in an eccentric fashion with the rotation of gear sprocket 71, in a fashion that bears a resemblance to the

movement of a skipping rope. It should be noted that the internal workings and connections of moveable arm 36 remain stationary. This connection serves as part of a control linkage, generally indicated on **FIGURES 1** through **4**, by reference numeral 44, that serves to maintain the correct rotational positioning of arm 36 as pipe support 14 rotates.

Referring to **FIGURE 13**, a flexible drive linkage 48 extends through arm 36 to welding head 38. Flexible drive linkage 48 is adapted to provide control over the orientation of welding head 38. In most welding applications that selected orientation will be a vertical orientation, without regard to the rotational position of pipe support 14, as can be seen from a review of **FIGURES 5** through **12**. Referring to **FIGURE 16**, it is preferred that applicator head 38 oscillate and for that purpose an oscillating drive 81 is provided. Referring to **FIGURE 14**, positioned at a remote end of arm 36 are a pair of swash plates 83 and 85. Swash plates 83 and 85 rotate with exterior housing 73 that covers arm 36. Swash plates 83 and 85 are angularly offset to reflect the angular positioning of exterior housing 73. Referring to **FIGURE 21** and **22**, the oscillations of applicator head 38 is controlled by a movable sensor 87 oscillating between angularly offset rotating swash plates 83 and 85. As can be seen by a comparison of **FIGURES 21** and **22**, the angular offset of swash plates 83 and 85 means that as they rotate the space available between them for oscillating movement of movable sensor 87 varies. On the proto-type oscillating drive 81, illustrated in **FIGURE 16** was hydraulically operated. By creating a master to slave relationship between movable sensor 87 and oscillating drive 81, the oscillations of applicator head 38 were made to duplicate the oscillations of movable sensor 87.

The method for circumferential welding of overlay materials to an interior surface of a curved pipe will now be described with reference to **FIGURES 1** through **22**. Apparatus 10 is provided as illustrated in **FIGURE 1**. Apparatus 10

includes pipe support 14 having rotational axis 22. A curved section of pipe 20 is fitted with collars 26 and mounted to pipe support 14. Arm 36 supporting welding head 38 is positioned within curved section of pipe 20 as illustrated in

5 **FIGURE 2.** Welding head 38 is moved to a selected position along interior surface 50 of curved section of pipe 20 by moving collars 26 along opposed guide tracks 24 using guidance source 34, as illustrated in **FIGURES 2** through **4** and **FIGURE 18.** The welding operation is performed by rotating pipe support 14

10 by means of rotational drive 42 as illustrated in **FIGURES 5** through **12** and **FIGURE 14.** Pipe support 14 is rotated about rotational axis 22. Guidance source 34 provides a linear pulling force along rails 37. Longitudinal guide rails 24 provide an arcuate guide path which compensates for the

15 curvature of the pipe 20. Movement of arm 36 and applicator head 38 is coordinated with the rotation of pipe support 14 by a controller that has several aspects. A computer processor 46 is provided, as part of the controller to control such functions as speed of rotation of pipe support 14, but the

20 majority of the control functions are performed by mechanical control linkages. Referring to **FIGURE 14,** arm 36 rotates with pipe support 14 utilizing exterior housing 73 that moves with gear sprocket 71 in a fashion that resembles the movement of a skipping rope. A vertical positioning of applicator head 38

25 during rotational movement of pipe support 14 is maintained and controlled by flexible linkage 48. The oscillating amplitude of welding head 38 is adjusted as pipe support 14 rotates to compensate for differences in length of curvature of the pipe. Referring to **FIGURES 21** and **22,** this is controlled through the

30 master to slave relationship between movable sensor 87 which oscillates between swash plates 83, 85 and oscillator drive 81. The rotational speed of pipe support 14 is controlled by processor 46 during welding to compensate for changes in the rate of application of welding bead due to variations in the

35 oscillation amplitude. Through speed control the welding bead can either be made substantially uniform or can be adjusted to leave substantially more or substantially less of a deposit at

specific rotational positions.

It will be apparent to one skilled in the art that modifications may be made to the illustrated embodiment without
5 departing from the spirit and scope of the invention as hereinafter defined in the Claims.

THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

- 5 1. A method for circumferential application of materials to
an interior surface of a curved pipe, comprising the steps of:
providing a pipe support with a rotational axis;
mounting a curved section of pipe to the pipe support;
positioning an arm supporting an applicator head within
10 the curved section of pipe;
rotating the pipe support about the rotational axis, while
coordinating movement of the arm to maintain the applicator
head in a working position within the curved section of pipe.
- 15 2. The method as defined in Claim 1, the arm rotating with the
pipe support.
3. The method as defined in Claim 1, including the further
step of varying the rotational speed of the pipe support to
20 control a rate of application.
4. The method as defined in Claim 1, including the further
step of oscillating the applicator head and varying the
oscillating amplitude of the applicator head to compensate for
25 differences in length of curvature of the pipe.

5. A method for circumferential application of materials to an interior surface of a curved pipe, comprising the steps of:
- providing a pipe support with a rotational axis;
 - 5 mounting a curved section of pipe to the pipe support;
 - positioning an arm supporting an applicator head within the curved section of pipe;
 - rotating the pipe support about the rotational axis, while coordinating movement of the arm to maintain the applicator
 - 10 head in a working position within the curved section of pipe;
 - varying the oscillating amplitude of the applicator head to compensate for differences in length of curvature of the pipe; and
 - varying the rotational speed of the pipe support to
 - 15 compensate for changes in rate of application due to variations in the oscillation amplitude of the applicator head.

6. An apparatus for circumferential application of materials to an interior surface of a curved pipe, comprising:

a base;

5 a pipe support having a cavity adapted to receive a curved section of pipe, the pipe support being mounted to the base for rotation about a rotational axis;

an arm extending into the cavity of the pipe support;

an applicator head mounted to the arm;

10 a rotational drive adapted to rotate the pipe support about the rotational axis;

a controller adapted to coordinate movement of the arm with the rotational positioning of the pipe support.

15 7. The apparatus as defined in Claim 6, wherein the arm rotates with the pipe support.

8. The apparatus as defined in Claim 6, wherein the controller coordinates the position of the applicator head with the
20 rotational positioning of the pipe support.

9. The apparatus as defined in Claim 6, wherein the pipe support includes longitudinal guides and guidance source adapted to move a curved section of pipe along the longitudinal
25 guides.

10. The apparatus as defined in Claim 9, wherein the longitudinal guides include guide tracks, the guide tracks engaging movable members which are adapted for attachment to
30 a curved section of pipe, the guidance source being adapted to move the movable members along the longitudinal guides.

11. The apparatus as defined in Claim 10, wherein the movable members have guide wheels that engage the guide tracks.

35

12. The apparatus as defined in Claim 9, wherein several longitudinal guides are provided, each one of the several

longitudinal guides being adapted to accommodate a curved section of pipe having a different curvature.

13. The apparatus as defined in Claim 9, wherein the longitudinal guidance source applies a linear pulling force and the longitudinal guides provide an arcuate guide path to compensate for a curvature of the pipe.

14. The apparatus as defined in Claim 6, wherein the rotational drive includes a drive motor which drives a pair of spaced driven sprockets which engage a gear sprocket on the pipe support, and thereby impart a rotational force to the pipe support.

15. The apparatus as defined in Claim 6, wherein a linkage extends through the arm to the applicator head, the flexible linkage being adapted to control orientation of the applicator head.

16. The apparatus as defined in Claim 6, wherein the applicator head oscillates with an amplitude of such oscillations being controlled by a movable sensor oscillating between a pair of angularly offset rotating swash plates carried by the rotating pipe support, the movable sensor having a master to slave relationship with an oscillating drive for the applicator head.

17. An apparatus for circumferential application of materials to an interior surface of a curved pipe, comprising:

5 a base;

a pipe support having a cavity adapted to receive a curved section of pipe, the pipe support being mounted to the base for rotation about a rotational axis;

an arm extending into the cavity of the pipe support;

10 an applicator head mounted to the arm;

a rotational drive adapted to rotate the pipe support about the rotational axis;

a controller adapted to coordinate movement of the arm and the position of the applicator head with the rotational positioning of the pipe support;

15 the pipe support having longitudinal guides, movable members engaging the longitudinal guides, the movable members being adapted for attachment to a curved section of pipe, and a guidance source which provides a linear pulling force to the movable members, thereby moving the curved section of pipe along the longitudinal guides, the longitudinal guides providing an arcuate guide path to compensate for a curvature of the pipe.

25 18. The apparatus as defined in Claim 17, wherein the longitudinal guides include guide tracks, and movable members have guide wheels that engage the guide tracks.

19. The apparatus as defined in Claim 17, wherein several 30 interchangeable longitudinal guides are provided, each one of the several longitudinal guides being adapted to accommodate a curved section of pipe having a different curvature.

20. The apparatus as defined in Claim 17, wherein the 35 rotational drive includes a drive motor which drives a pair of spaced driven sprockets which engage a gear sprocket on the pipe support, and thereby impart a rotational force to the pipe

support.

21. The apparatus as defined in Claim 17, wherein a linkage extends through the arm to the applicator head, the flexible
5 linkage being adapted to control orientation of the applicator head.

22. The apparatus as defined in Claim 17, wherein the applicator head oscillates with such oscillations being
10 controlled by a movable sensor oscillating between a pair of angularly offset rotating swash plates carried by the rotating pipe support, the movable sensor having a master to slave relationship with an oscillating drive for the applicator head.

15 23. The apparatus as defined in Claim 17, wherein the arm rotates with the pipe support.

24. An apparatus for circumferential application of materials to an interior surface of a curved pipe, comprising:

a base;

5 a pipe support having a cavity adapted to receive a curved section of pipe, the pipe support being mounted to the base for rotation about a rotational axis;

an arm extending into the cavity of the pipe support, the arm being coupled for rotation with the pipe support;

10 an oscillating applicator head mounted to the arm;

an oscillating drive for oscillating the applicator head;

a rotational drive adapted to rotate the pipe support about the rotational axis;

a flexible control linkage adapted to coordinate movement
15 of the applicator head with the rotational positioning of the pipe support and the arm, the flexible linkage being adapted to control orientation of the applicator head, the applicator head oscillating with such oscillations being controlled by a movable sensor oscillating between a pair of angularly offset
20 rotating swash plates carried by the rotating pipe support, the movable sensor having a master to slave relationship with the oscillating drive for the applicator head;

the pipe support having longitudinal guides, movable members engaging the longitudinal guides, the movable members
25 being adapted for attachment to a curved section of pipe, and a guidance source which provides a linear pulling force to the movable members, thereby moving the curved section of pipe along the longitudinal guides, the longitudinal guides providing an arcuate guide path to compensate for a curvature
30 of the pipe.

25. The apparatus as defined in Claim 24, wherein the longitudinal guides include guide tracks, and movable members have guide wheels that engage the guide tracks.

35

26. The apparatus as defined in Claim 24, wherein several interchangeable longitudinal guides are provided, each one of

27. The apparatus as defined in Claim 24, wherein the
5 rotational drive includes a drive motor which drives a pair of
spaced driven sprockets which engage a gear sprocket on the
pipe support, and thereby impart a rotational force to the pipe
support.

ABSTRACT OF THE DISCLOSURE

A method and apparatus for circumferential application of materials to an interior surface of a curved pipe includes providing a pipe support with a rotational axis. A curved section of pipe is mounted to the pipe support. An arm supporting an applicator head is positioned within the curved section of pipe. The pipe support is rotated about the rotational axis, while coordinating movement of the arm to maintain the applicator head in a working position within the curved section of pipe.

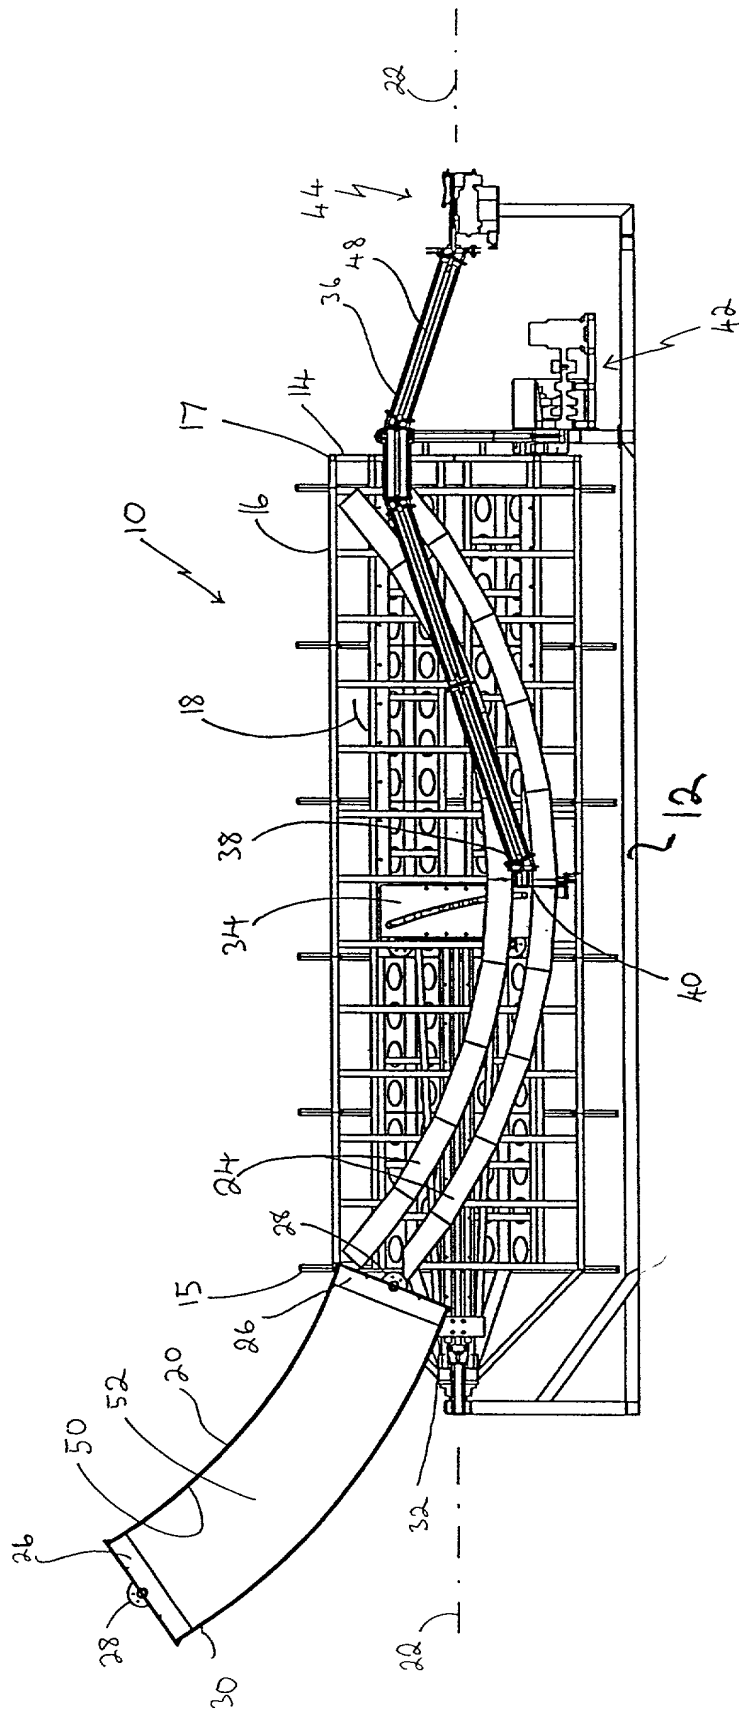


FIGURE 1

Year	Age	Sex	Height (cm)	Weight (kg)	Body Mass Index (kg/m ²)	Waist Circumference (cm)	Hip Circumference (cm)	Waist-Hip Ratio	Trunk Fat (%)	Visceral Fat (cm)	Subcutaneous Fat (cm)	Visceral Fat Index (cm ³)	Subcutaneous Fat Index (cm ³)	Visceral Fat to Subcutaneous Fat Ratio
1998	25	M	175	75	24.5	95	105	0.90	15	5	10	150	100	1.5
2000	27	M	178	80	25.0	98	108	0.91	16	6	11	160	110	1.5
2002	29	M	180	85	26.0	100	110	0.91	17	7	12	210	120	1.75
2004	31	M	182	90	27.0	102	112	0.91	18	8	13	270	130	2.08
2006	33	M	185	95	28.0	105	115	0.91	19	9	14	340	140	2.43
2008	35	M	188	100	28.5	108	118	0.91	20	10	15	420	150	2.80
2010	37	M	190	105	29.0	110	120	0.92	21	11	16	510	160	3.19
2012	39	M	192	110	29.5	112	122	0.92	22	12	17	610	170	3.59
2014	41	M	195	115	30.0	115	125	0.92	23	13	18	720	180	4.00
2016	43	M	198	120	30.5	118	128	0.92	24	14	19	840	190	4.42
2018	45	M	200	125	31.0	120	130	0.92	25	15	20	970	200	4.85
2020	47	M	202	130	31.5	122	132	0.92	26	16	21	1110	210	5.29
2022	49	M	205	135	32.0	125	135	0.93	27	17	22	1260	220	5.73
2024	51	M	208	140	32.5	128	138	0.93	28	18	23	1420	230	6.17
2026	53	M	210	145	33.0	130	140	0.93	29	19	24	1590	240	6.63
2028	55	M	212	150	33.5	132	142	0.93	30	20	25	1770	250	7.08
2030	57	M	215	155	34.0	135	145	0.93	31	21	26	1960	260	7.54
2032	59	M	218	160	34.5	138	148	0.93	32	22	27	2160	270	8.00
2034	61	M	220	165	35.0	140	150	0.93	33	23	28	2370	280	8.46
2036	63	M	222	170	35.5	142	152	0.93	34	24	29	2590	290	8.93
2038	65	M	225	175	36.0	145	155	0.93	35	25	30	2820	300	9.40
2040	67	M	228	180	36.5	148	158	0.93	36	26	31	3060	310	9.87
2042	69	M	230	185	37.0	150	160	0.94	37	27	32	3310	320	10.34
2044	71	M	232	190	37.5	152	162	0.94	38	28	33	3570	330	10.82
2046	73	M	235	195	38.0	155	165	0.94	39	29	34	3840	340	11.29
2048	75	M	238	200	38.5	158	168	0.94	40	30	35	4120	350	11.76
2050	77	M	240	205	39.0	160	170	0.94	41	31	36	4410	360	12.23
2052	79	M	242	210	39.5	162	172	0.94	42	32	37	4710	370	1

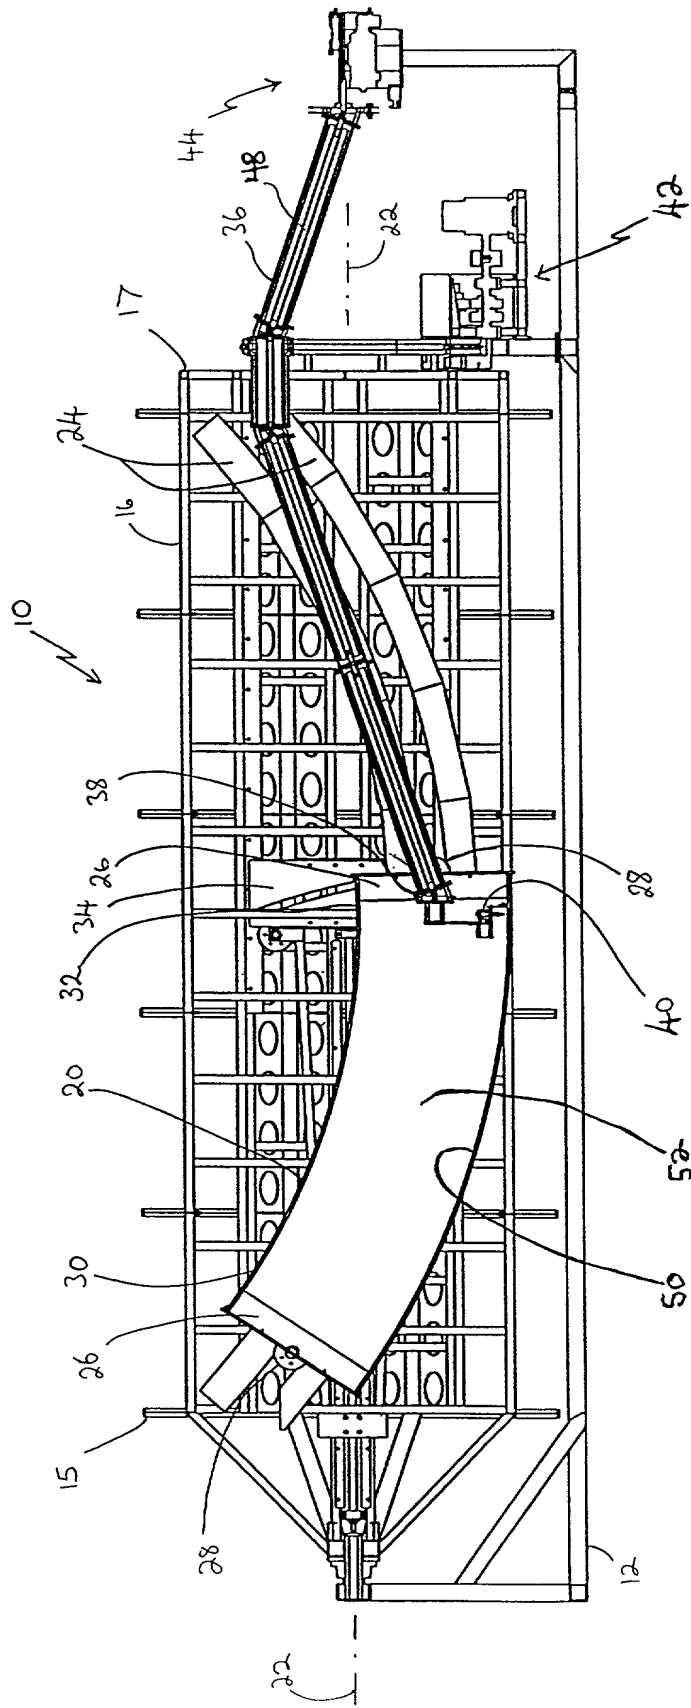


FIGURE 2

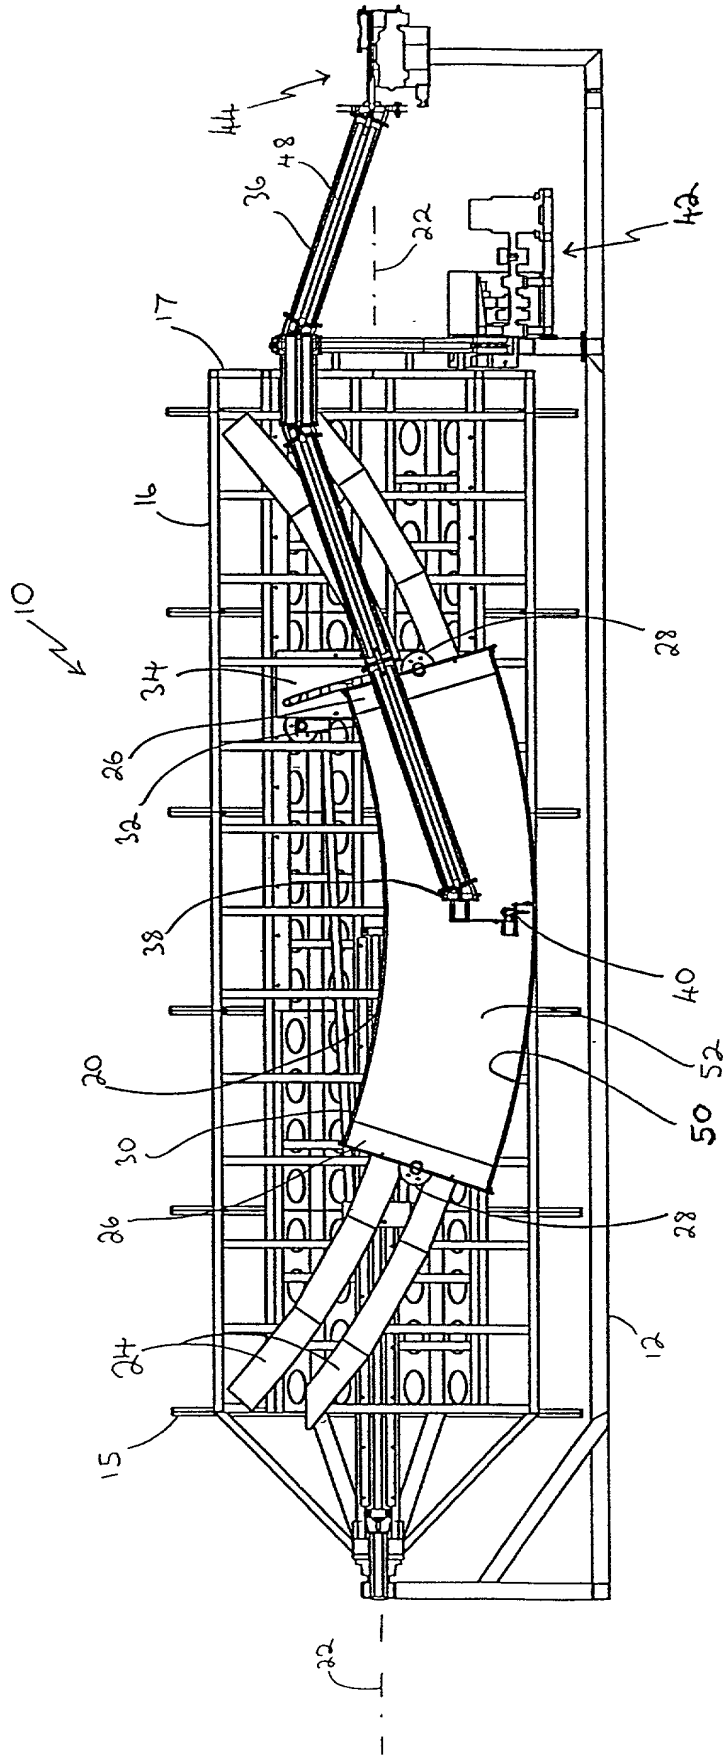


FIGURE 3

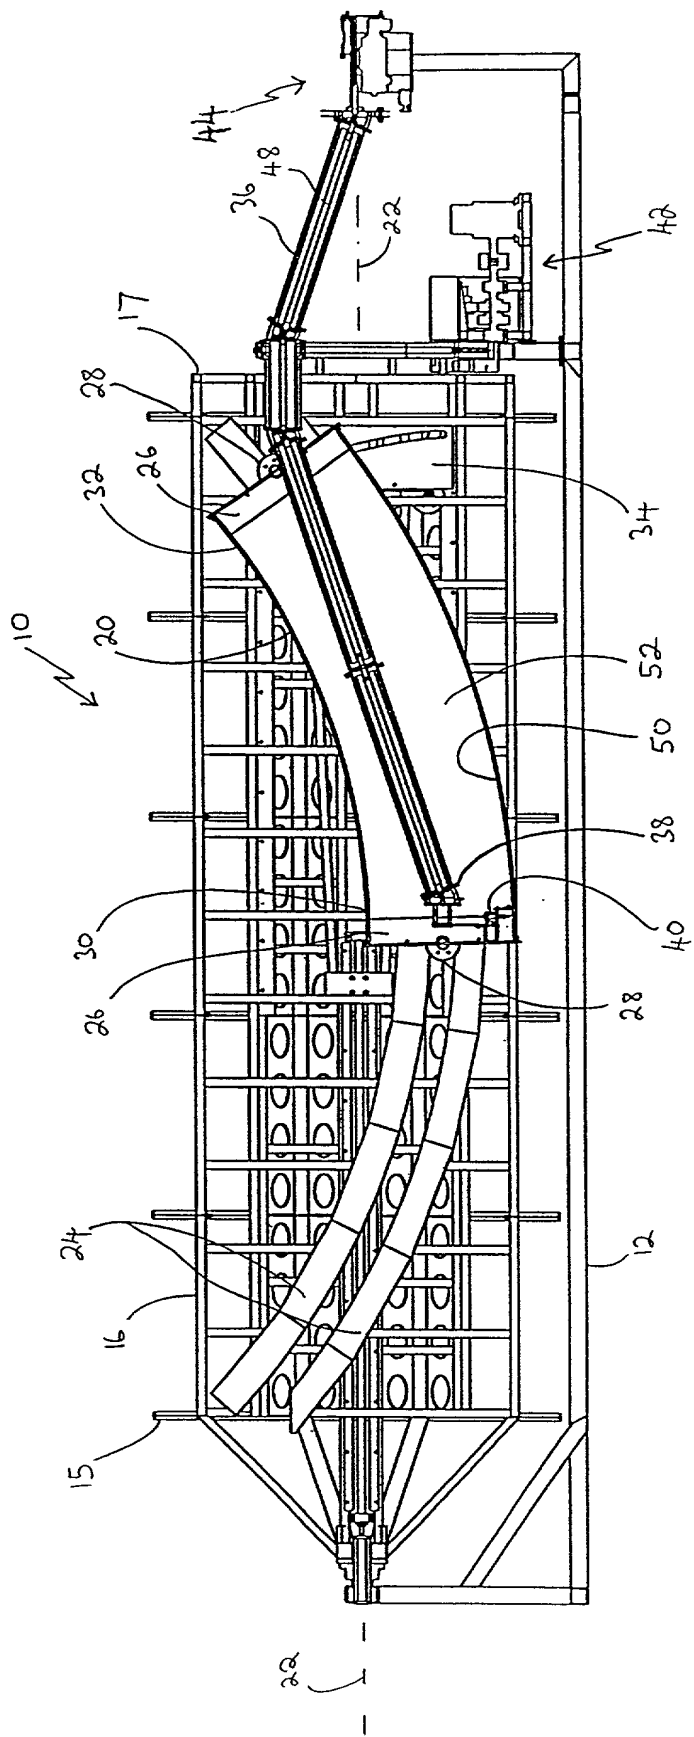
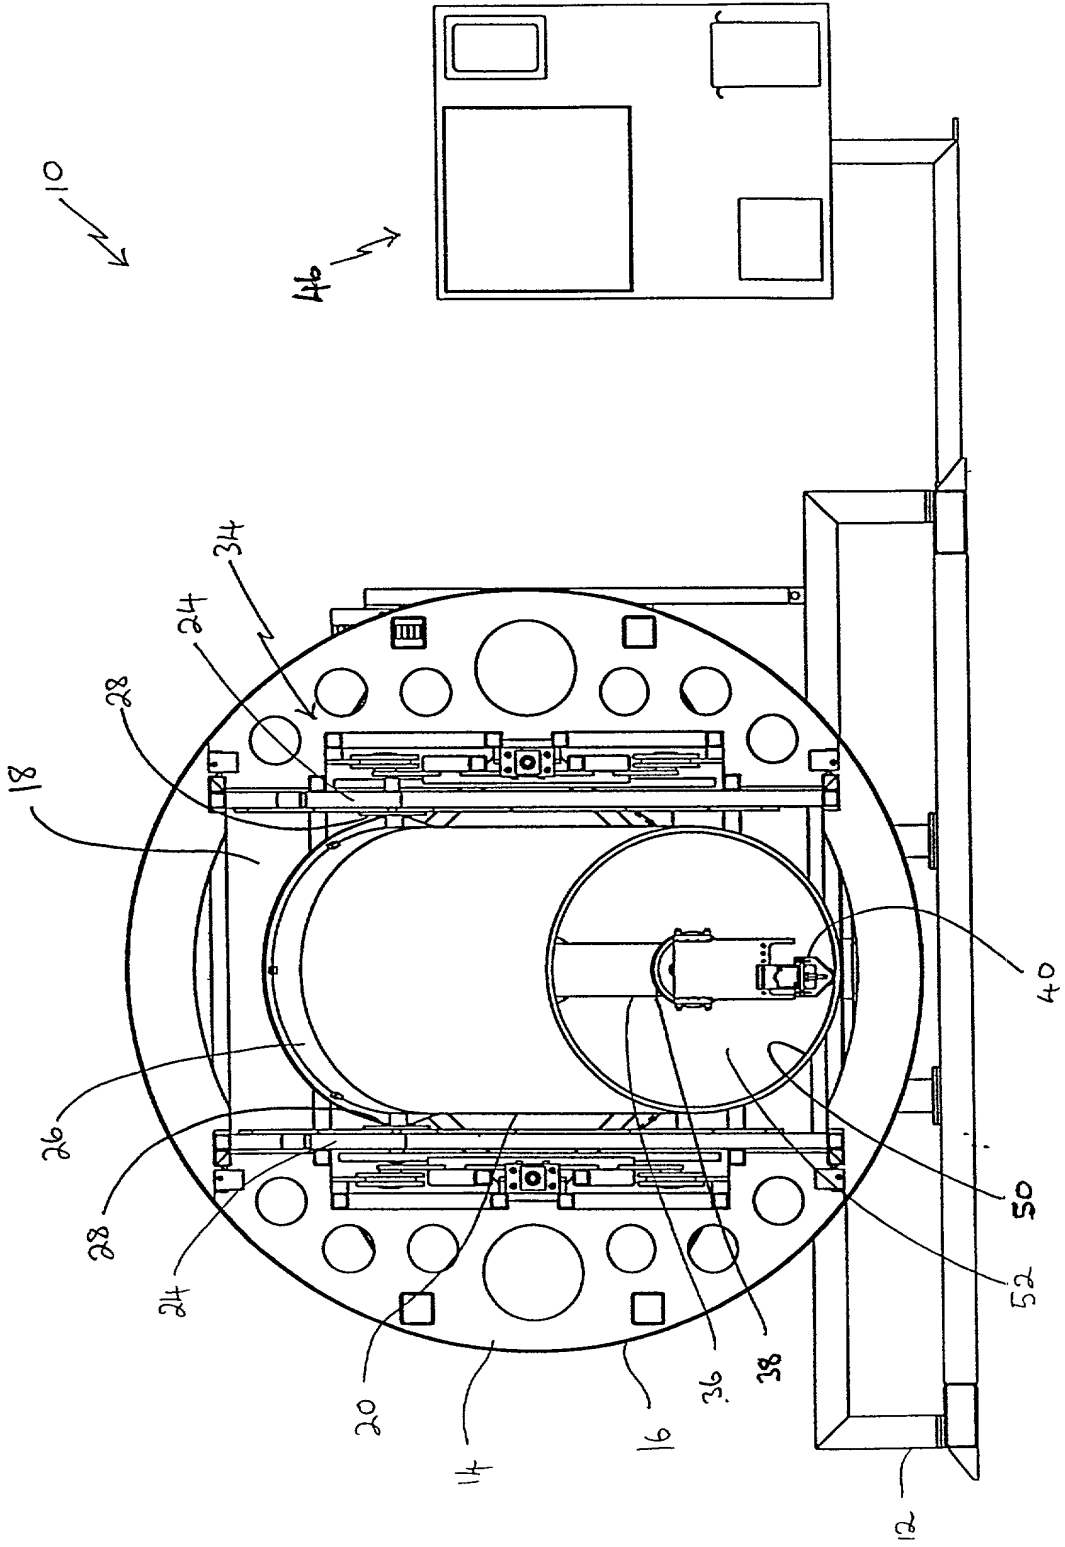
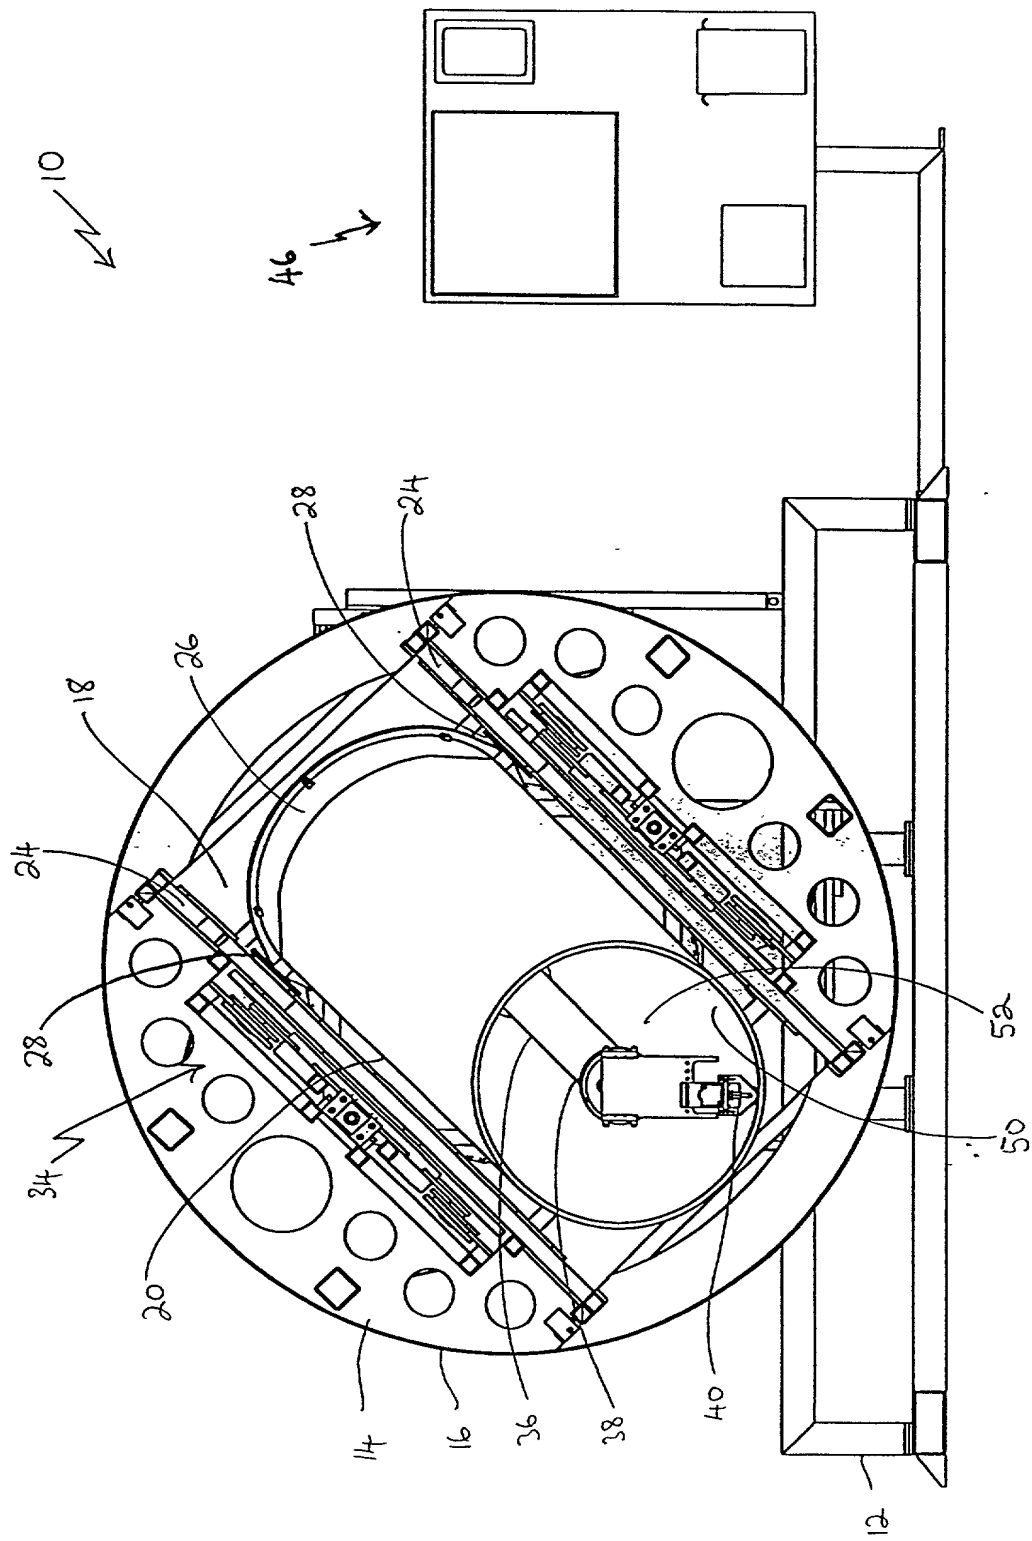


FIGURE 4





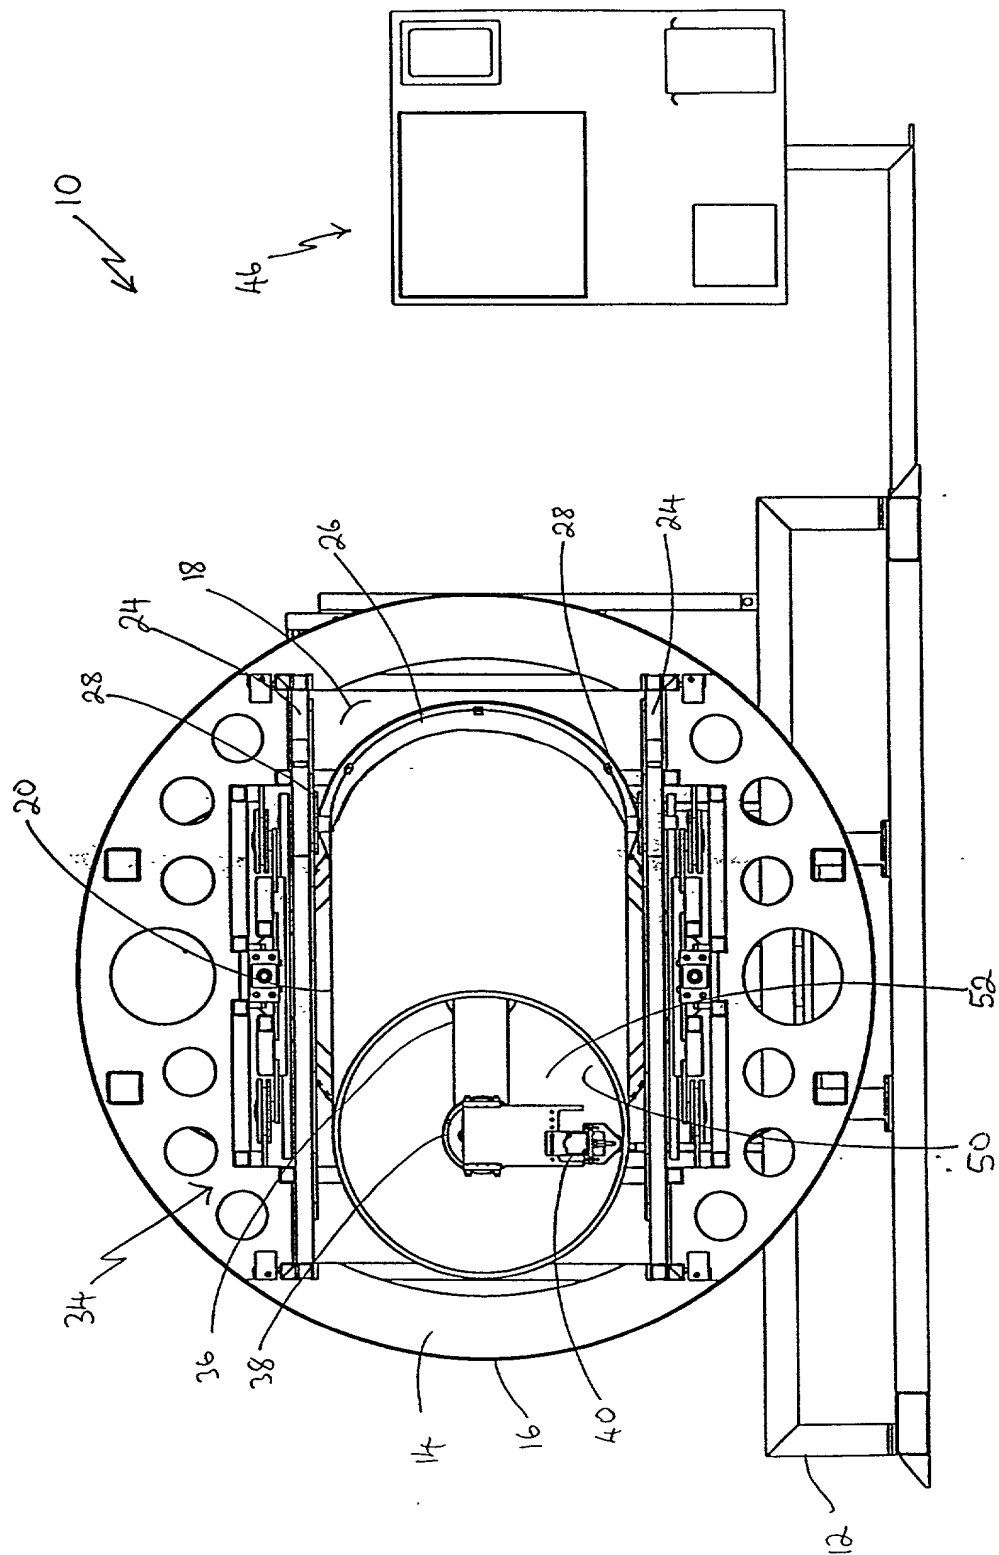


FIGURE 7

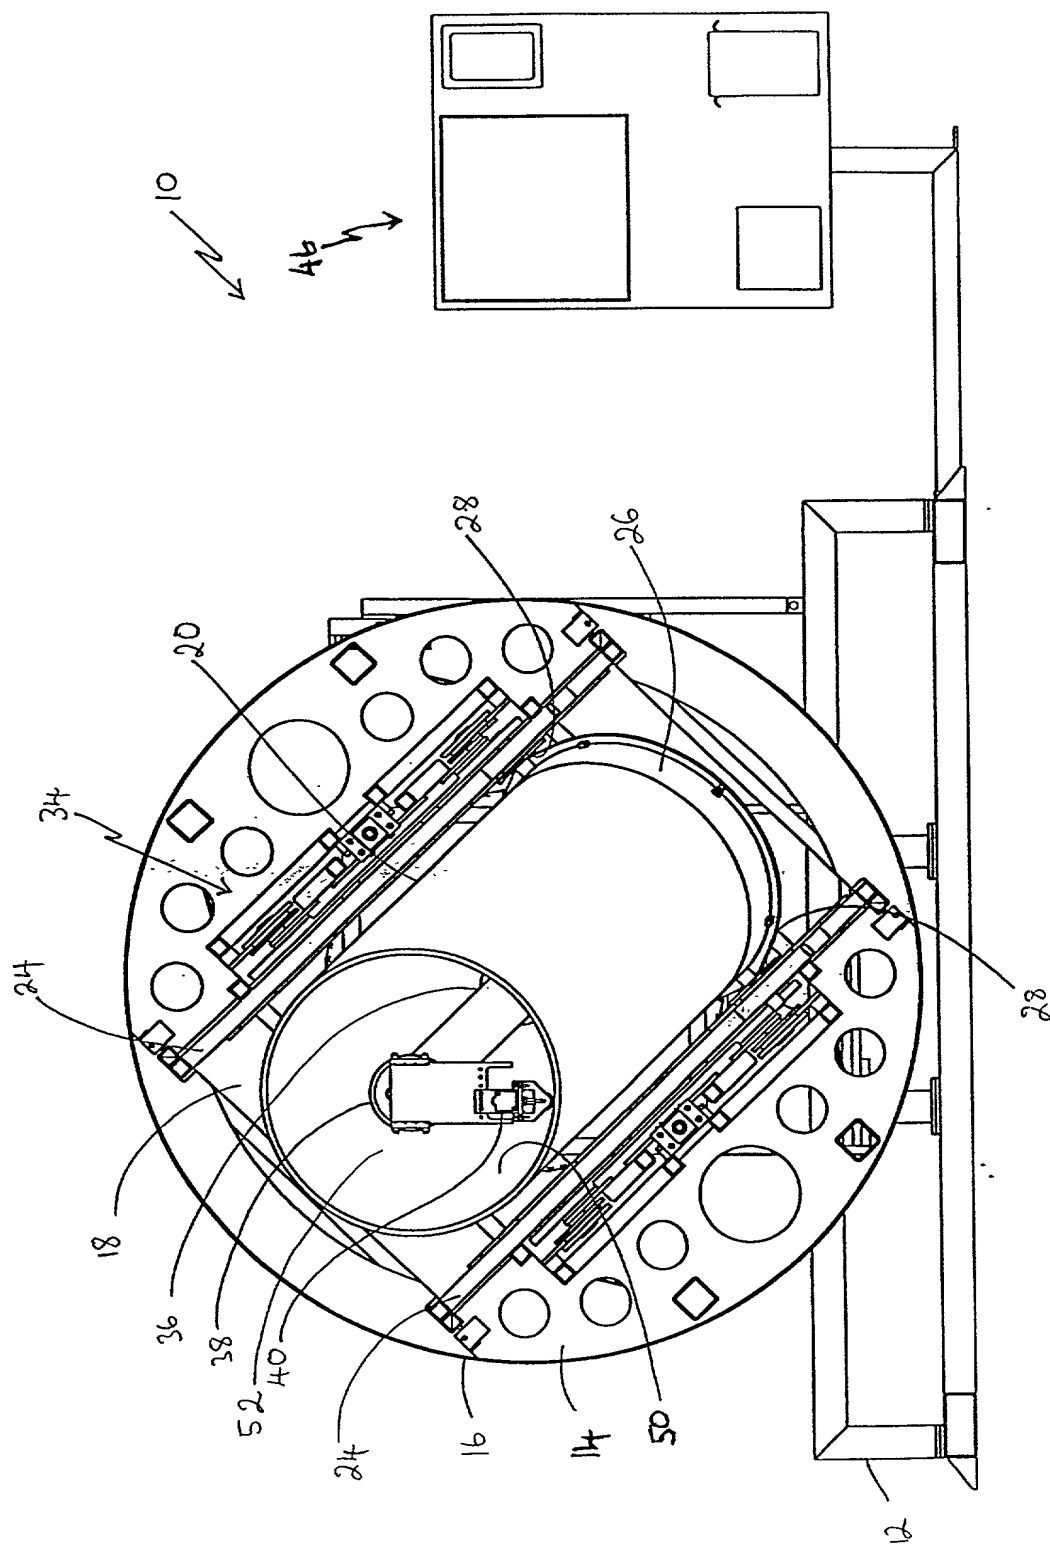


FIGURE 8


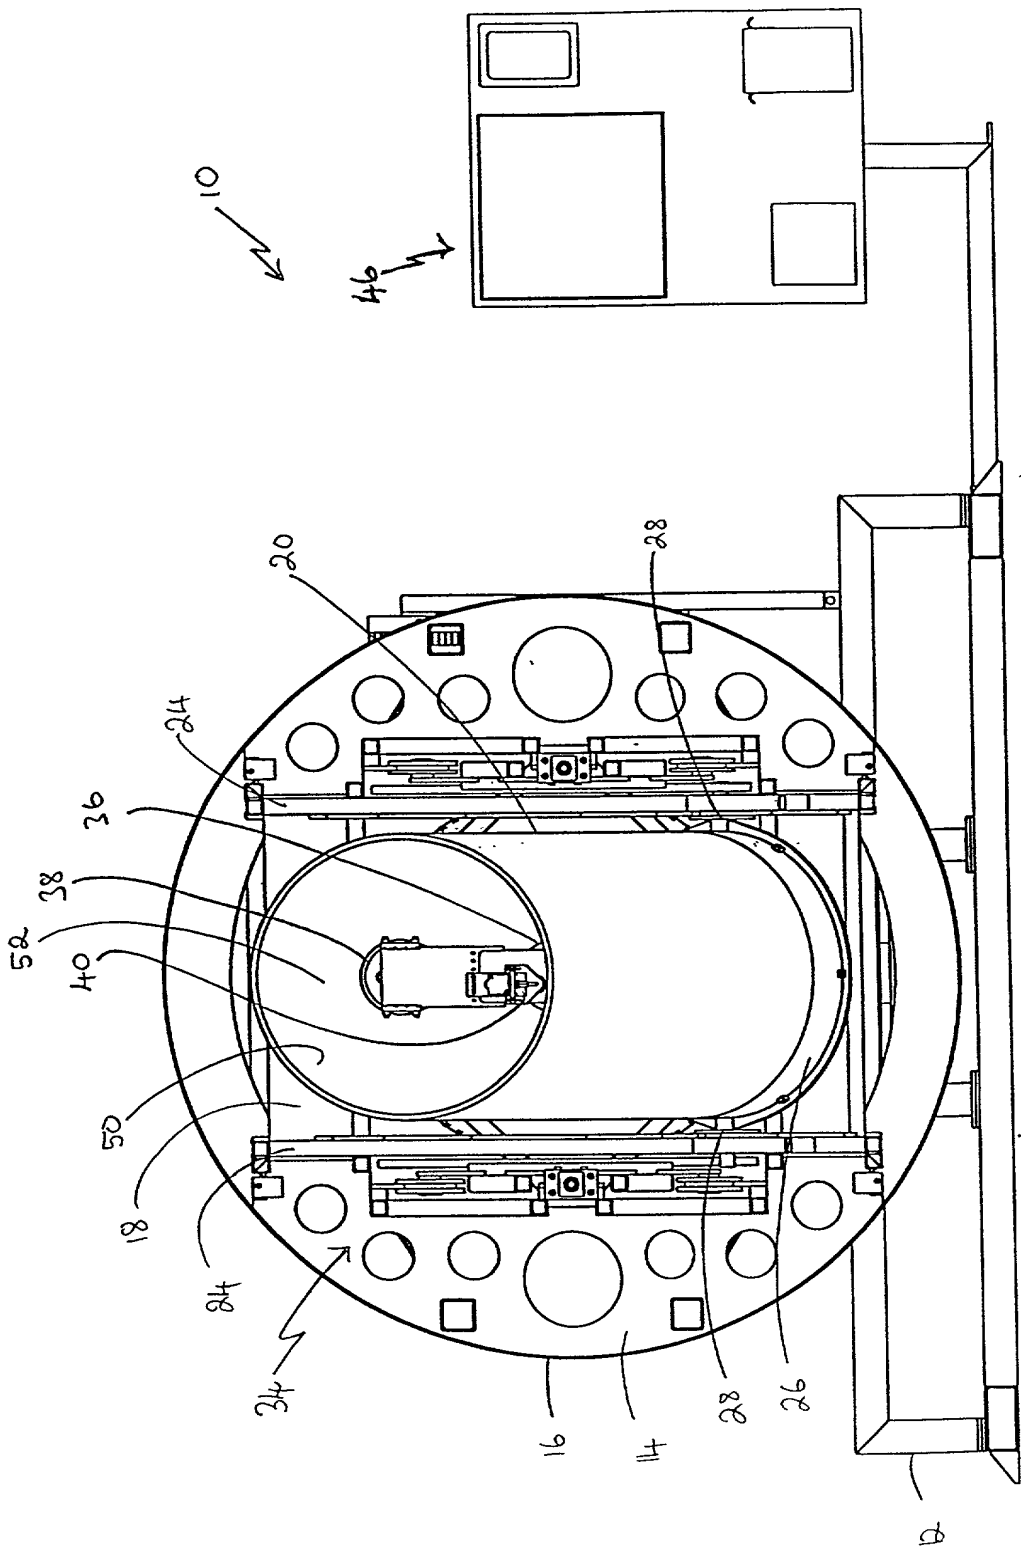


FIGURE 9

FIGURE 10

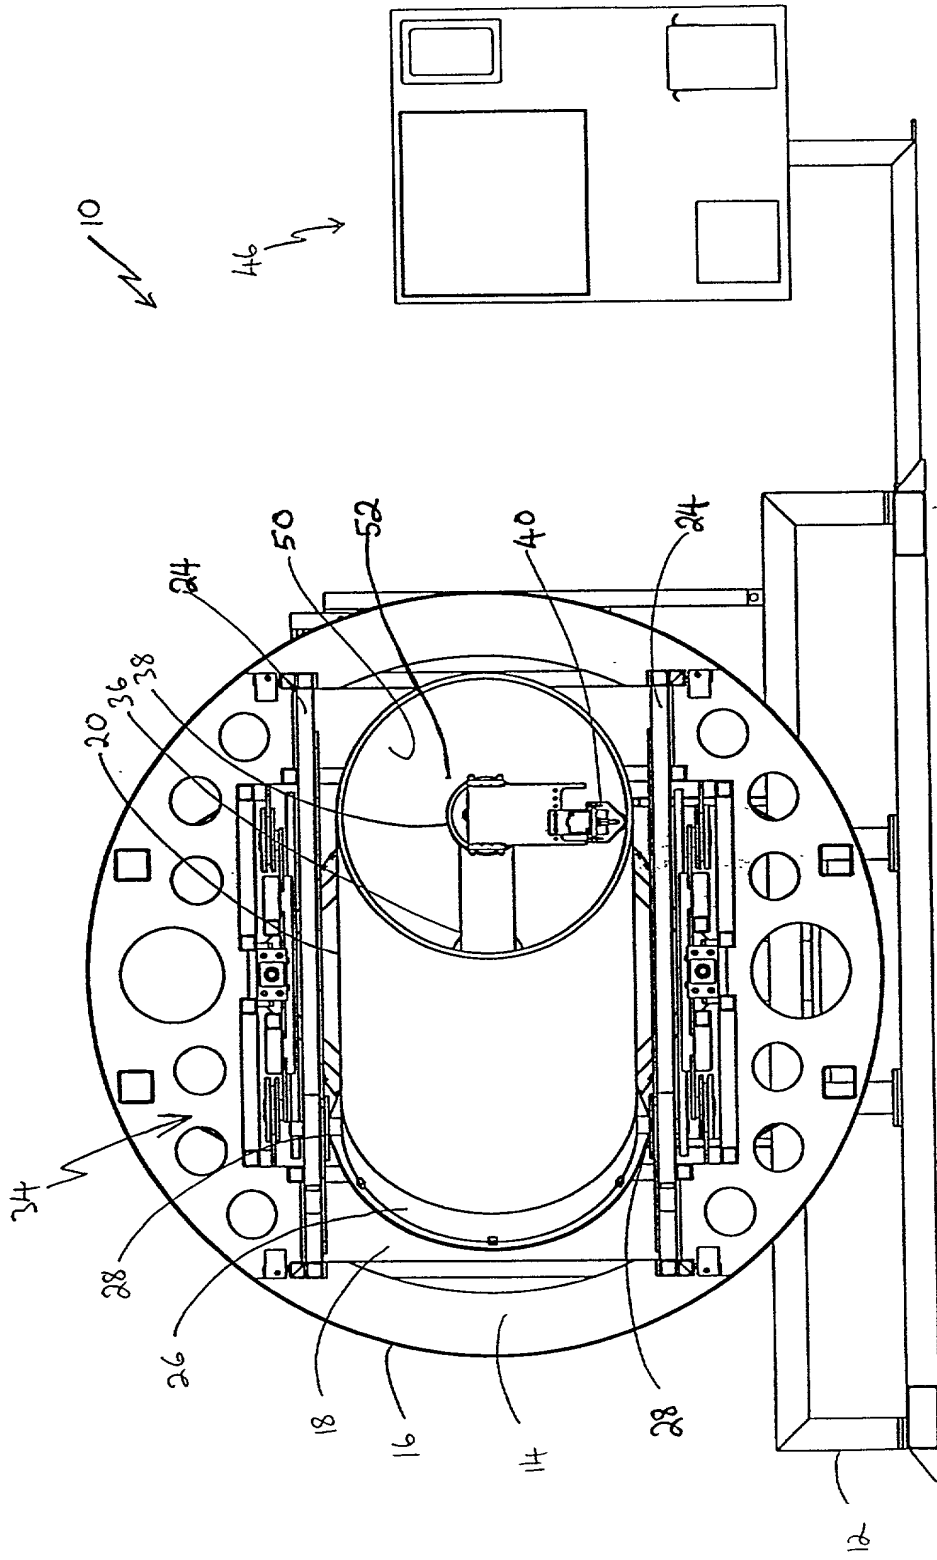

1	100	100	100
2	100	100	100
3	100	100	100
4	100	100	100
5	100	100	100
6	100	100	100
7	100	100	100
8	100	100	100
9	100	100	100
10	100	100	100
11	100	100	100
12	100	100	100
13	100	100	100
14	100	100	100
15	100	100	100
16	100	100	100
17	100	100	100
18	100	100	100
19	100	100	100
20	100	100	100
21	100	100	100
22	100	100	100
23	100	100	100
24	100	100	100
25	100	100	100
26	100	100	100
27	100	100	100
28	100	100	100
29	100	100	100
30	100	100	100
31	100	100	100
32	100	100	100
33	100	100	100
34	100	100	100
35	100	100	100
36	100	100	100
37	100	100	100
38	100	100	100
39	100	100	100
40	100	100	100
41	100	100	100
42	100	100	100
43	100	100	100
44	100	100	100
45	100	100	100
46	100	100	100
47	100	100	100
48	100	100	100
49	100	100	100
50	100	100	100
51	100	100	100
52	100	100	100
53	100	100	100
54	100	100	100
55	100	100	100
56	100	100	100
57	100	100	100
58	100	100	100
59	100	100	100
60	100	100	100
61	100	100	100
62	100	100	100
63	100	100	100
64	100	100	100
65	100	100	100
66	100	100	100
67	100	100	100
68	100	100	100
69	100	100	100
70	100	100	100
71	100	100	100
72	100	100	100
73	100	100	100
74	100	100	100
75	100	100	100
76	100	100	100
77	100	100	100
78	100	100	100
79	100	100	100
80	100	100	100
81	100	100	100
82	100	100	100
83	100	100	100
84	100	100	100
85	100	100	100
86	100	100	100
87	100	100	100
88	100	100	100
89	100	100	100
90	100	100	100
91	100	100	100
92	100	100	100
93	100	100	100
94	100	100	100
95	100	100	100
96	100	100	100
97	100	100	100
98	100	100	100
99	100	100	100
100	100	100	100

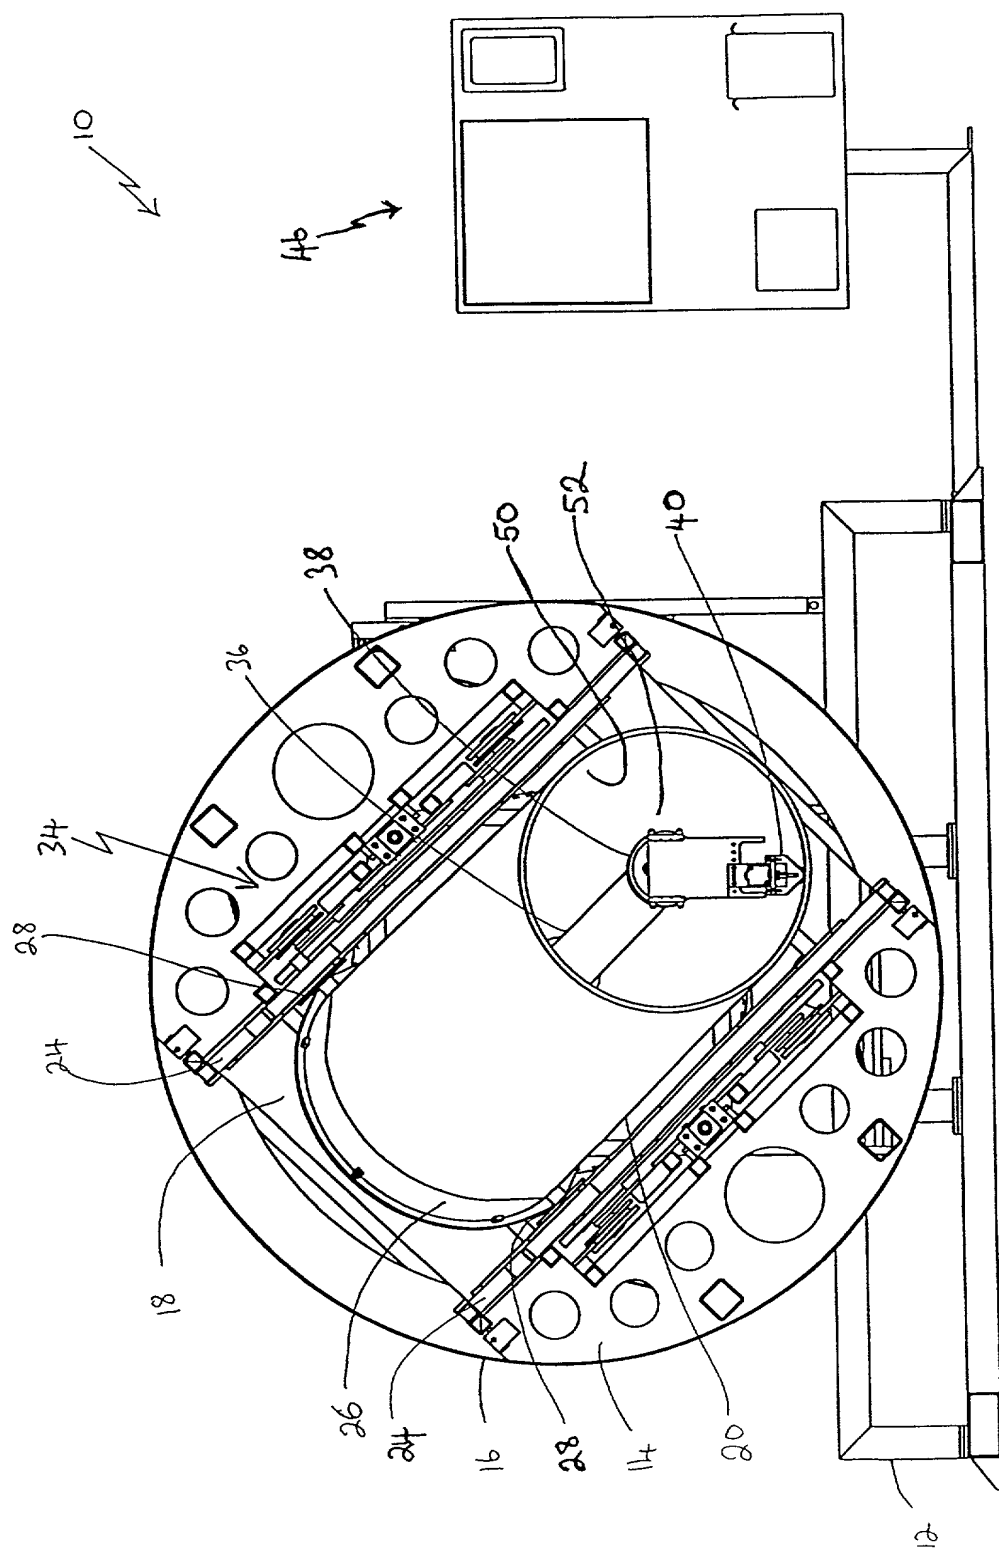


FIGURE 12

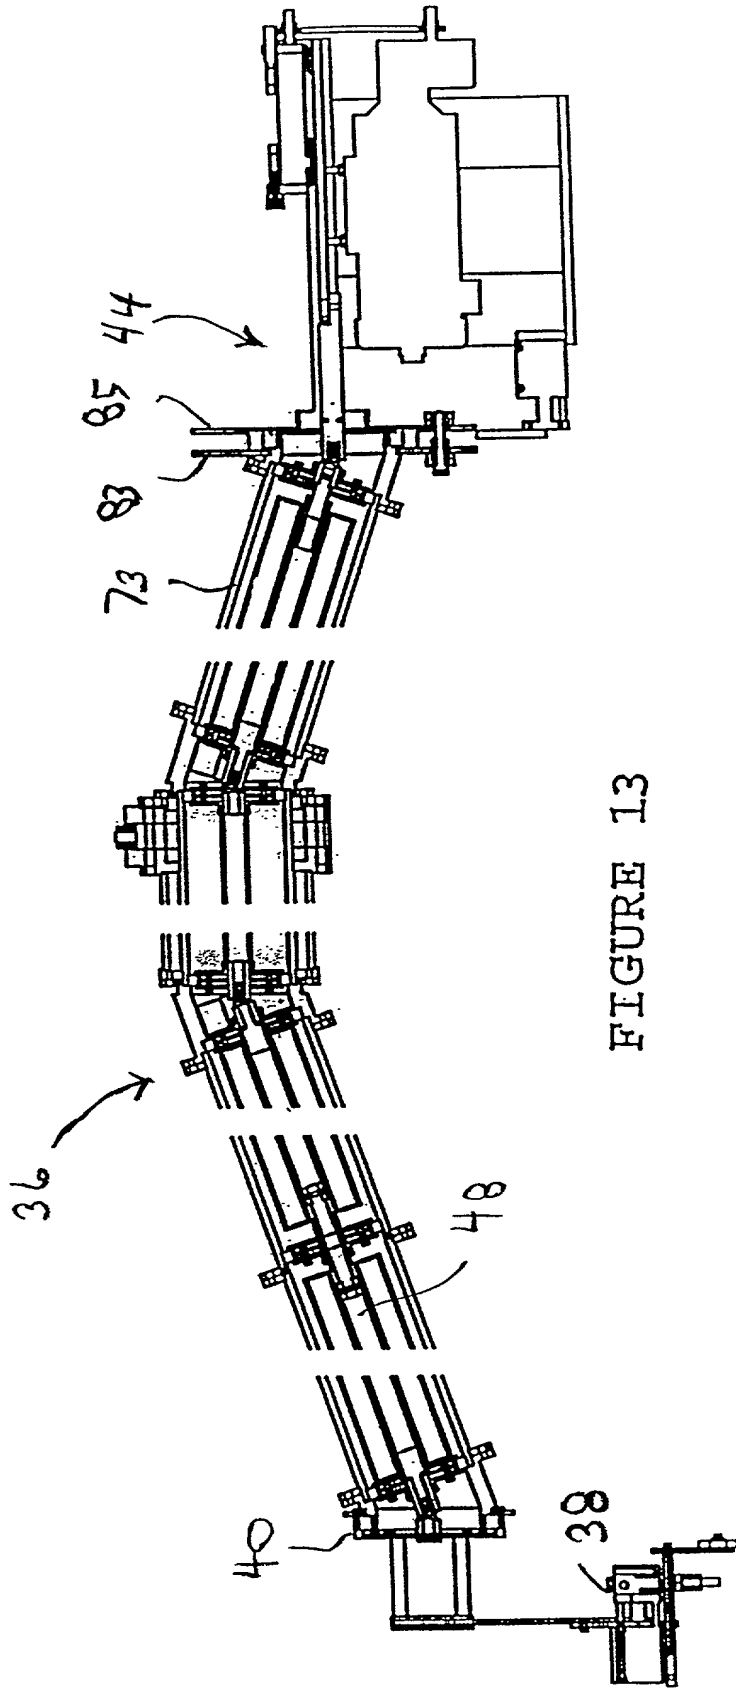


FIGURE 13

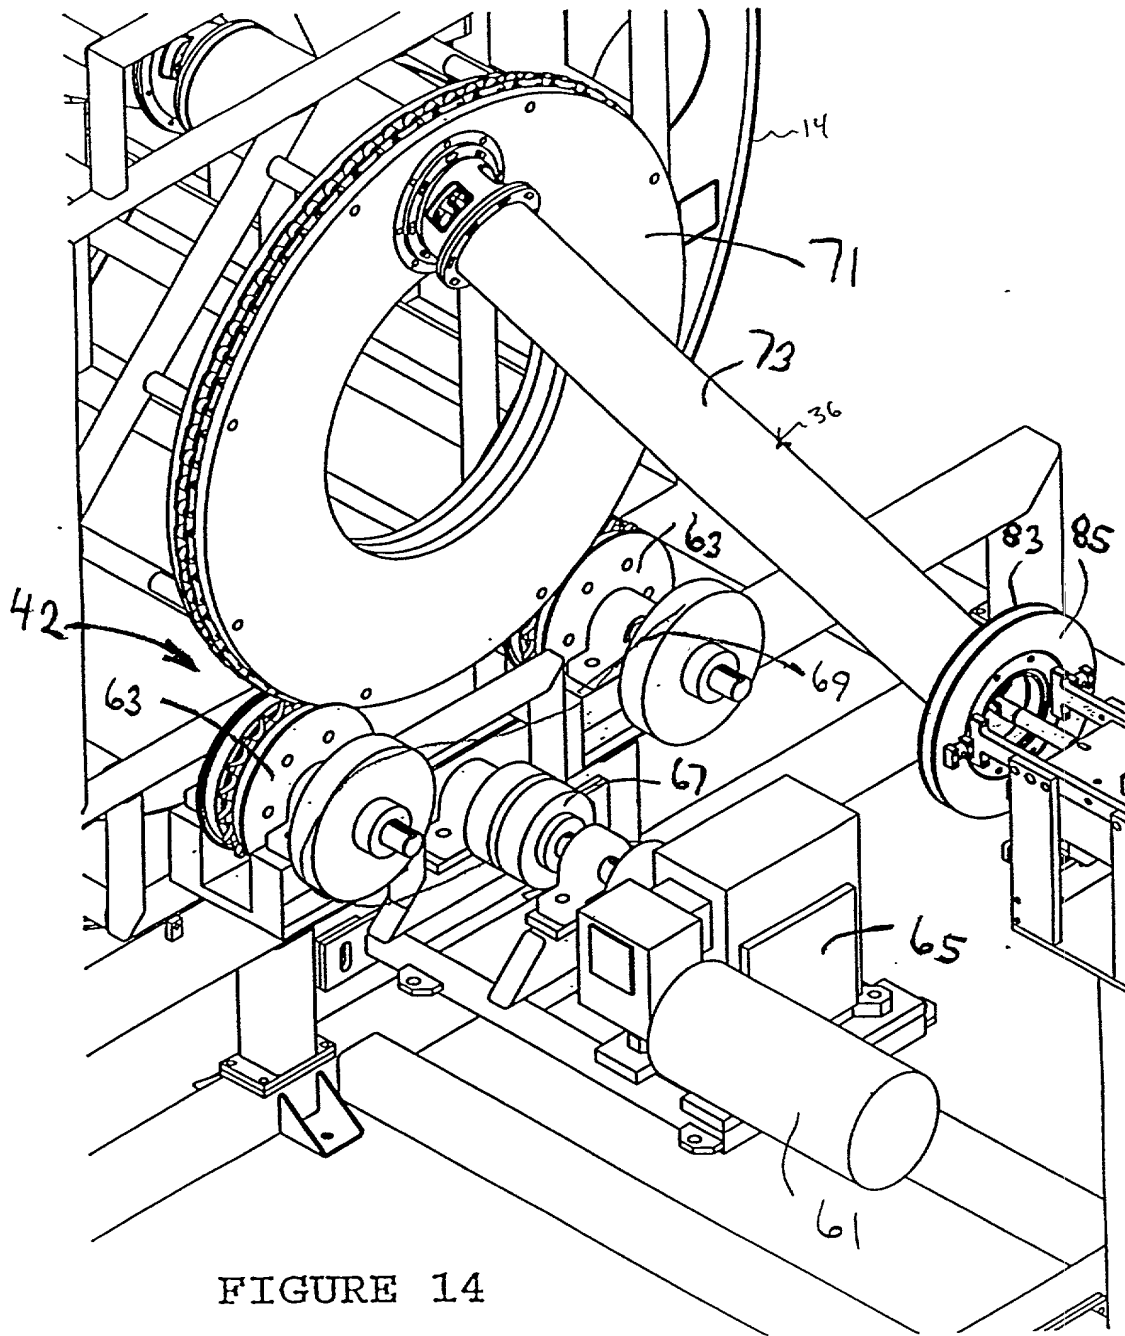


FIGURE 14

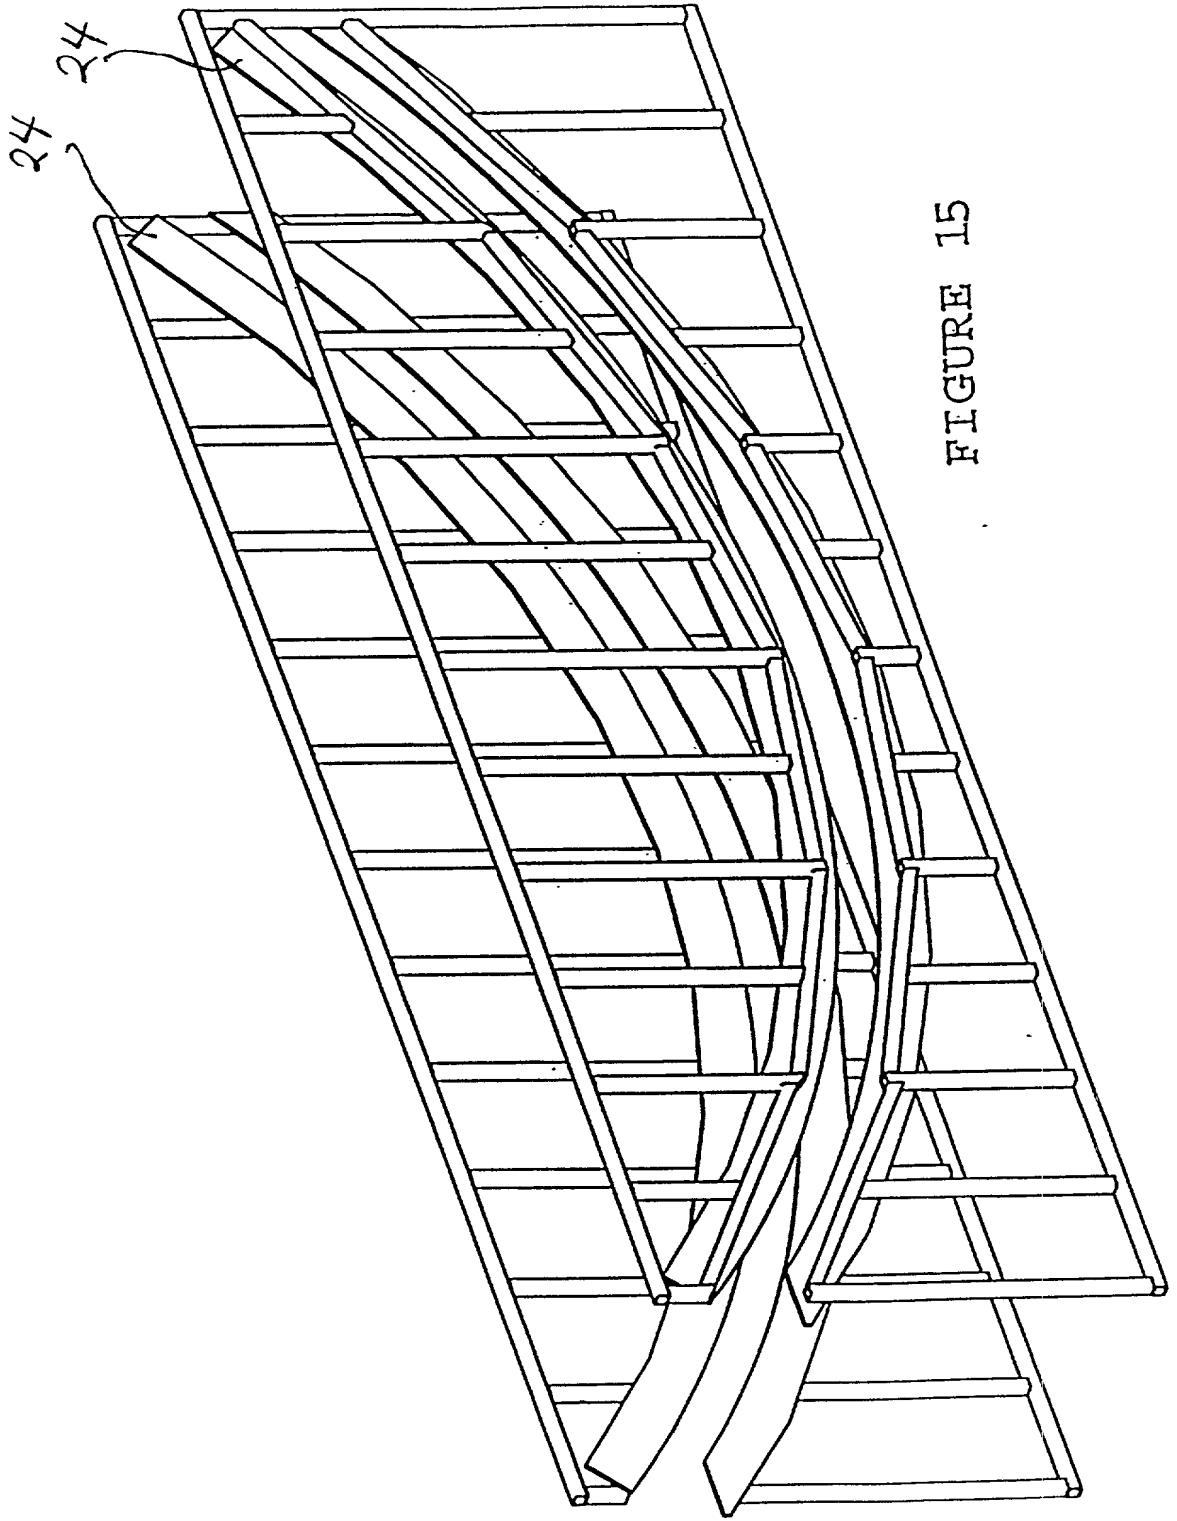


FIGURE 15

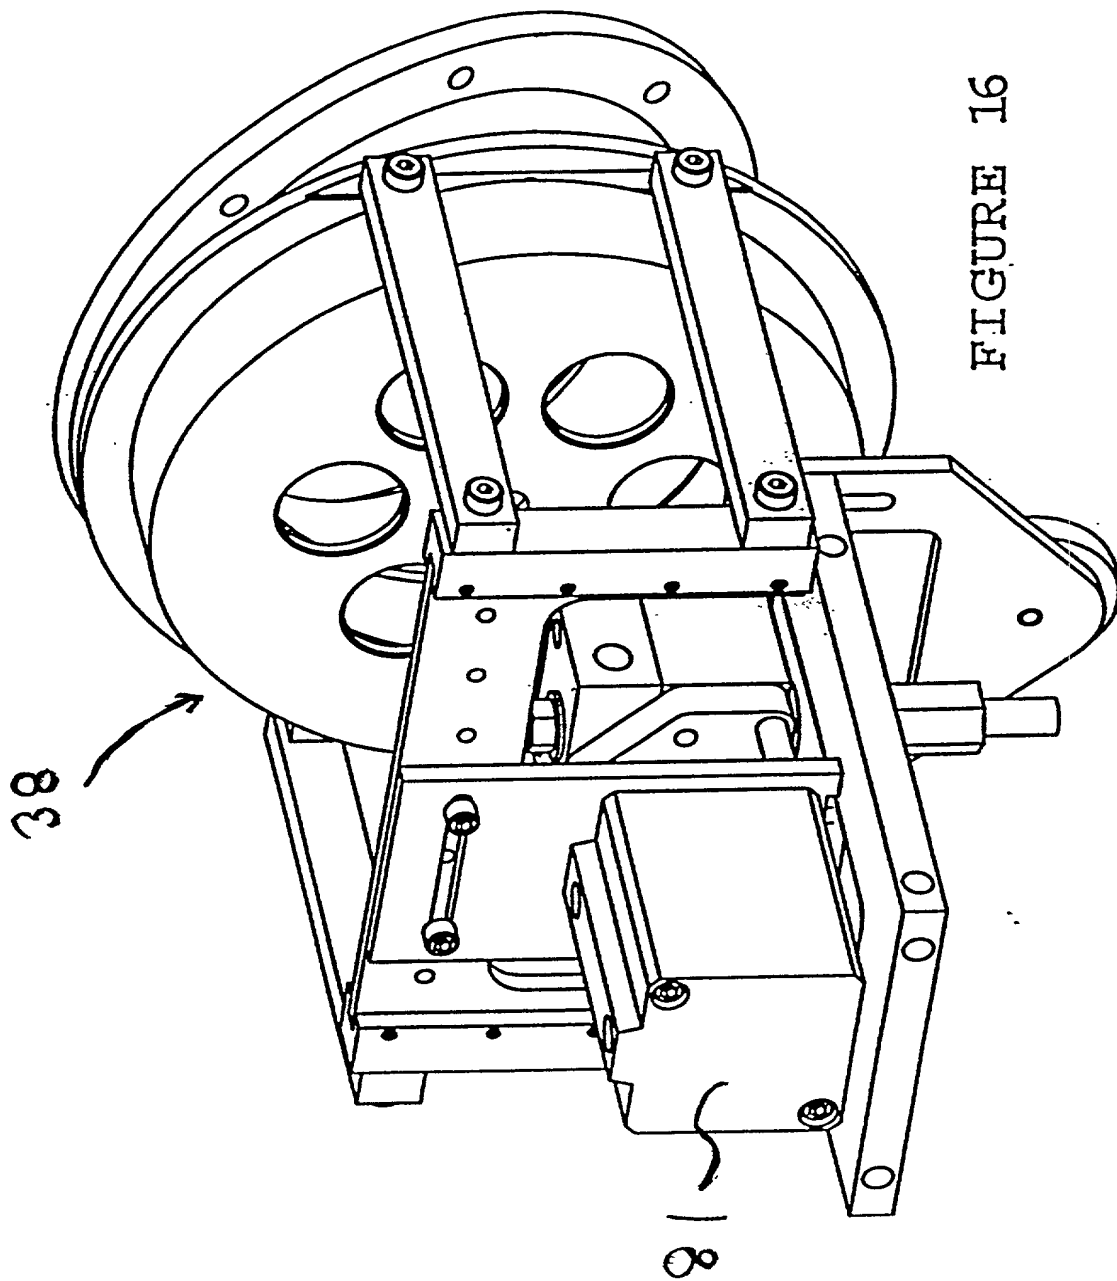


FIGURE 16

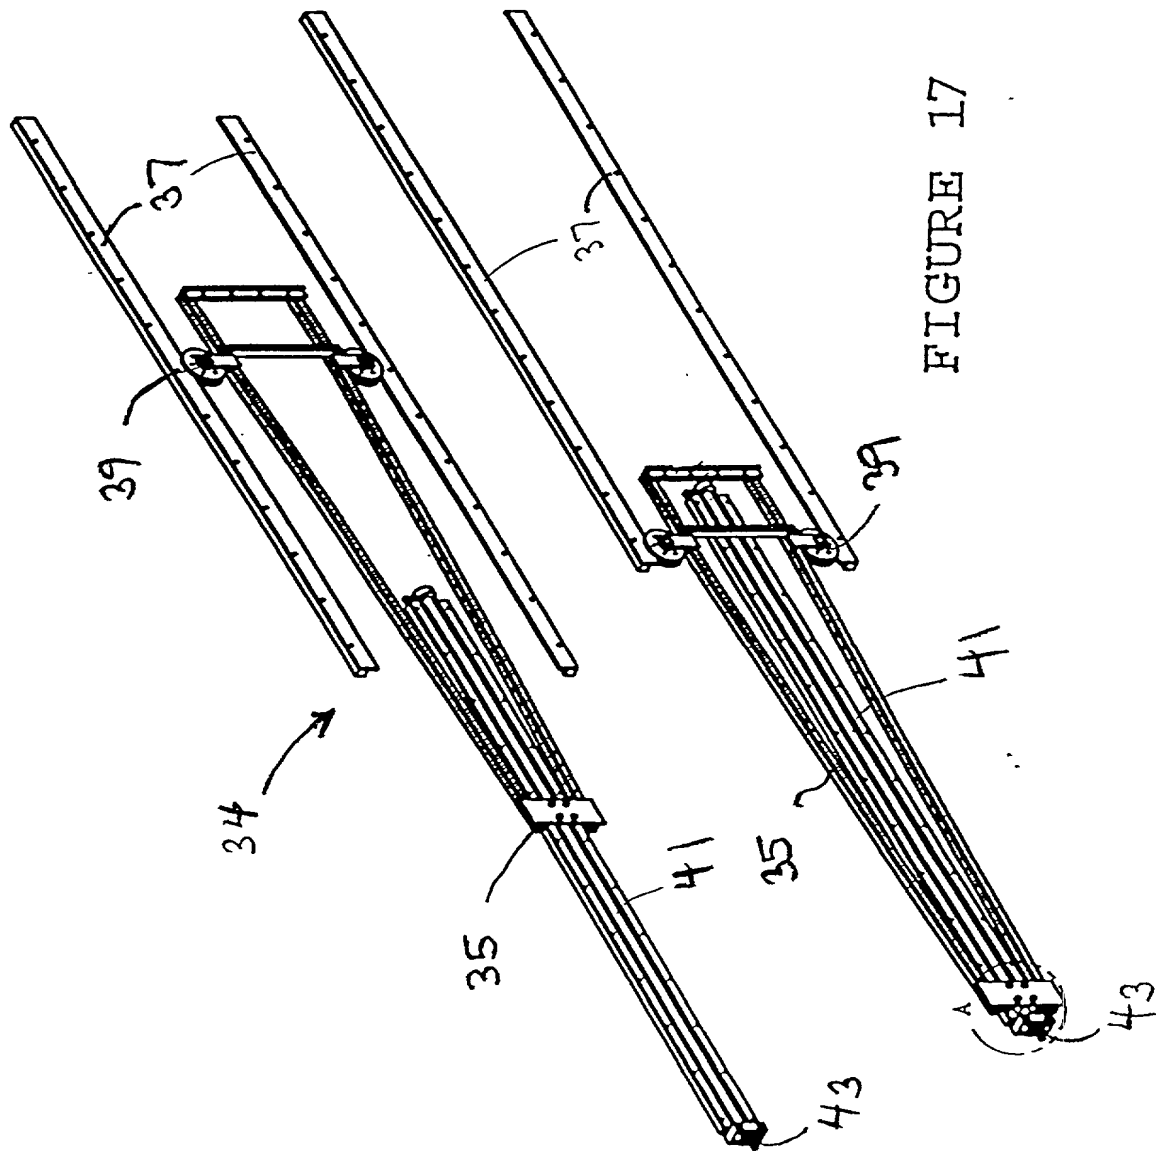


FIGURE 17

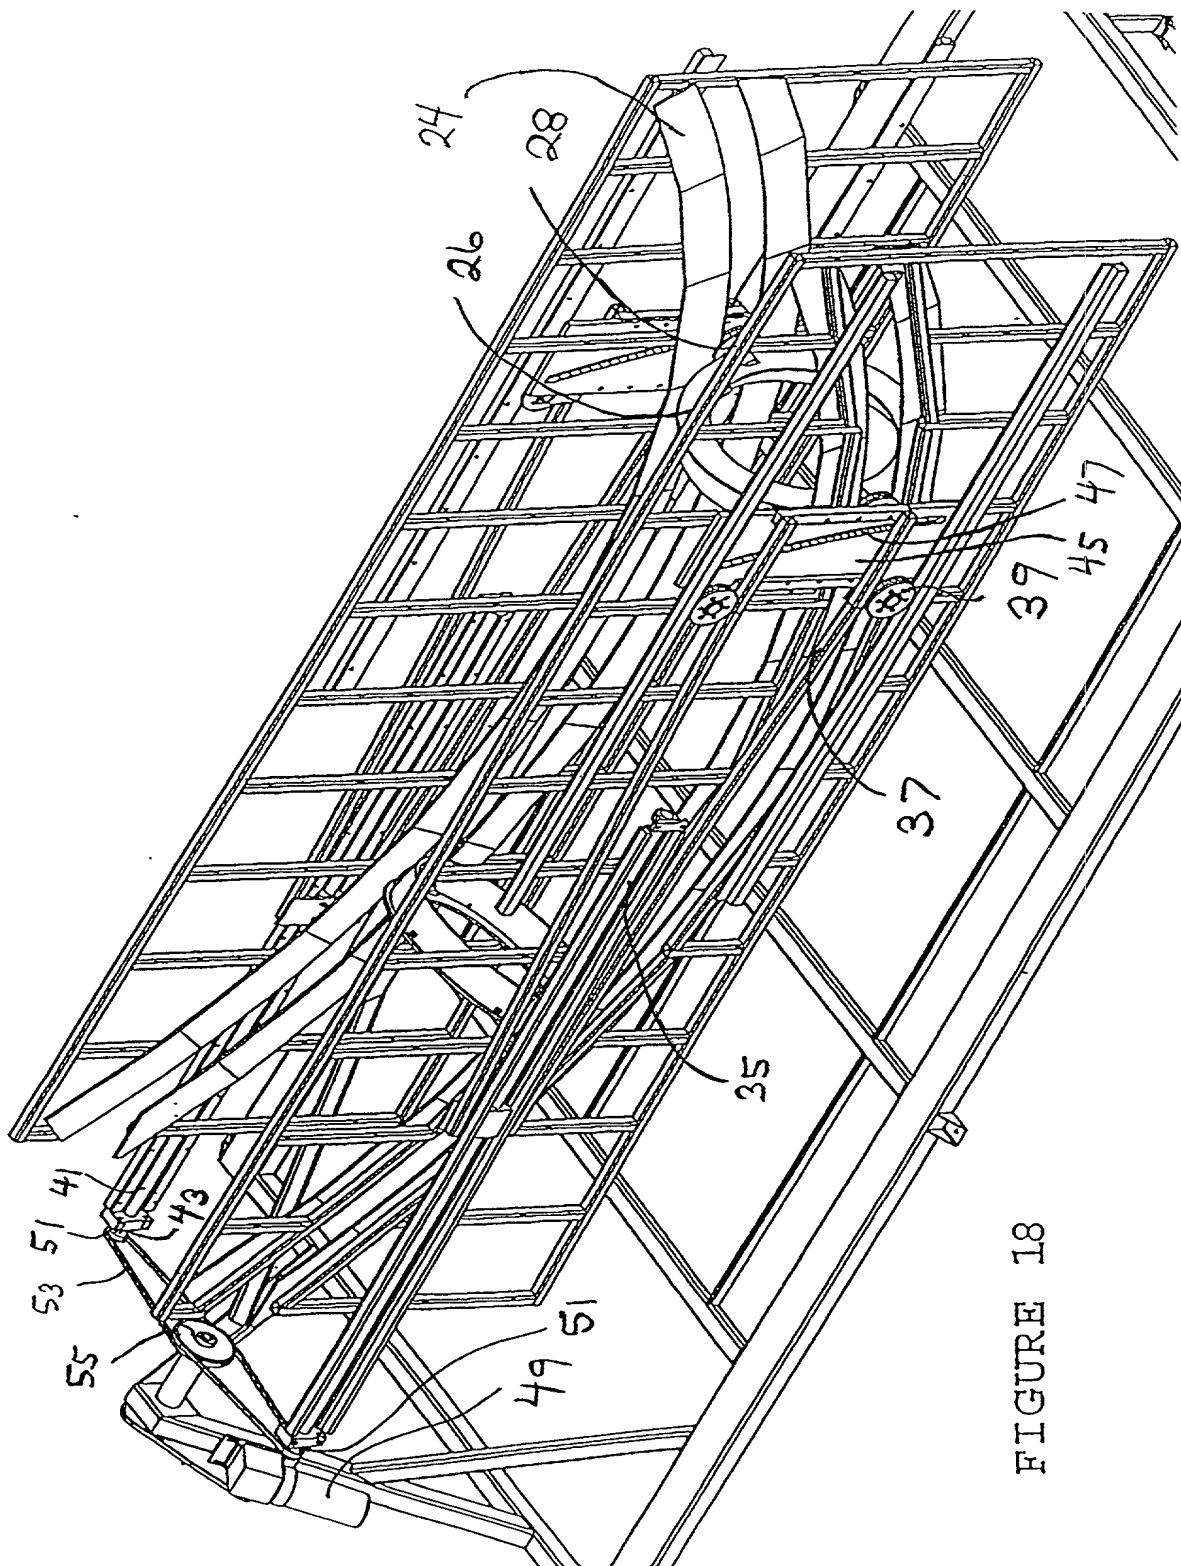


FIGURE 18

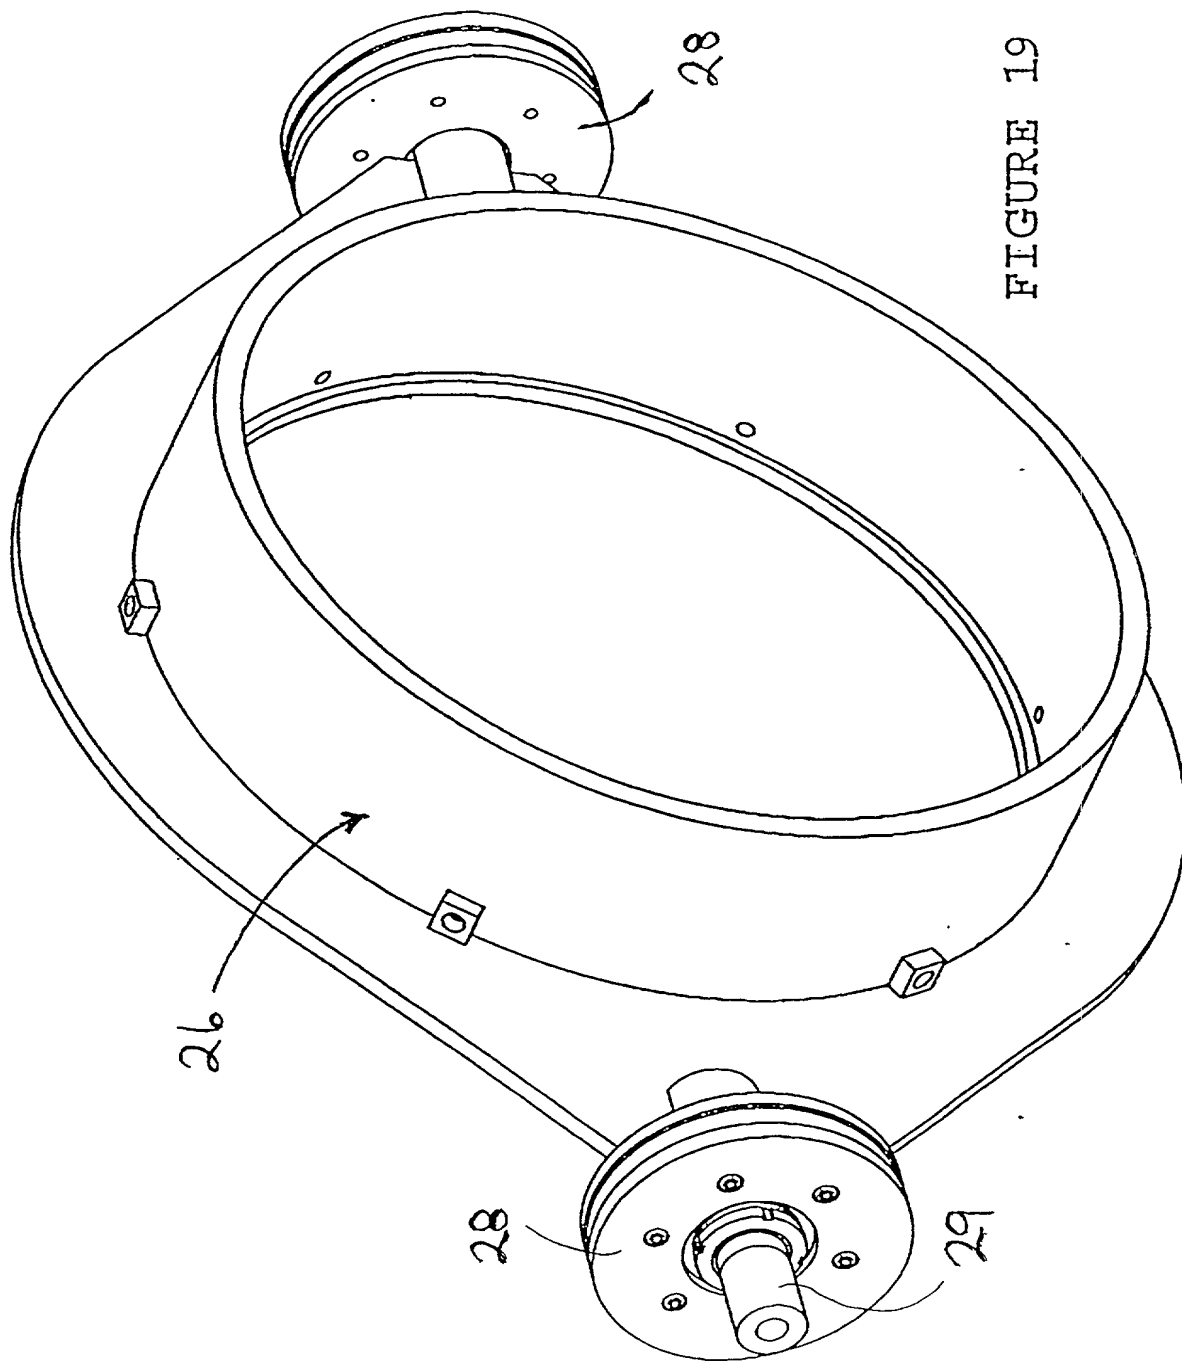


FIGURE 19

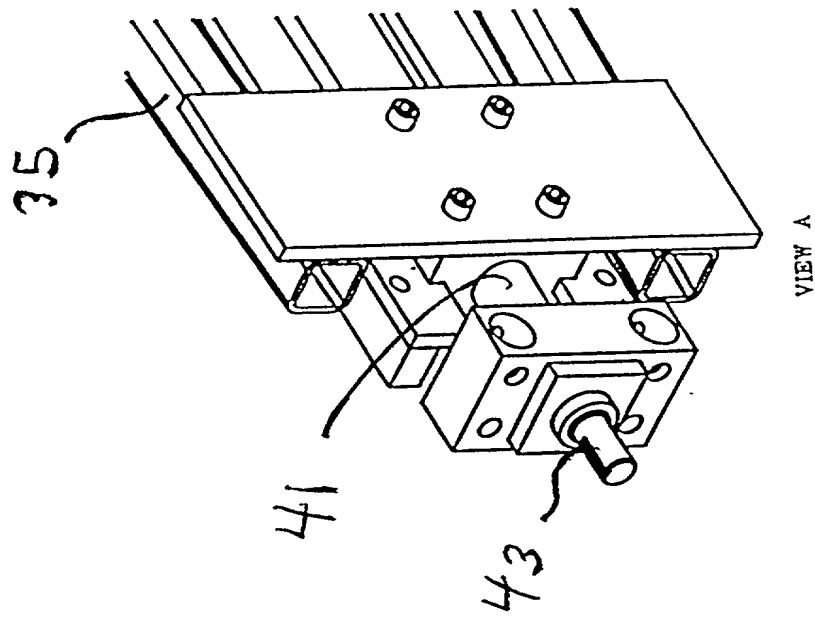


FIGURE 20

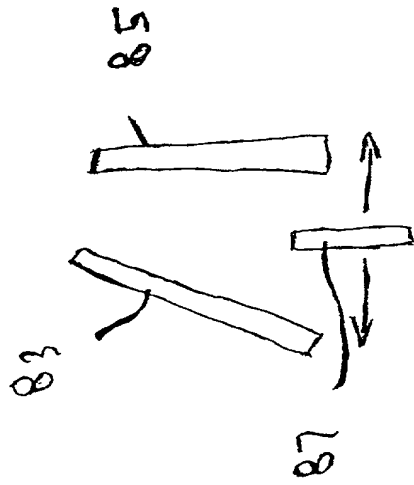


FIGURE 21

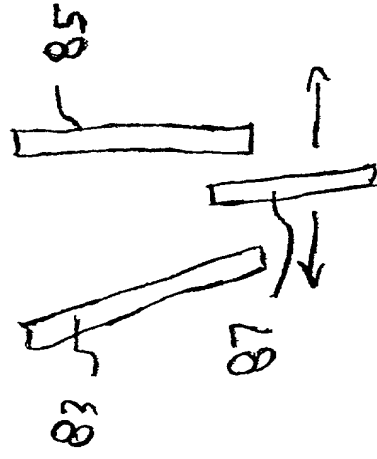


FIGURE 22

DECLARATION FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if one name is listed below) or an original, first and joint inventor (if more than one name is listed below) of the subject matter which is disclosed and/or claimed and for which a patent is sought on the invention entitled: **Method And Apparatus For Circumferential Application of Materials To An Interior Surface Of A Curved Pipe** the specification of which

xxx is attached hereto (as amended on _____)

_____ WAS FILED _____ as Application Serial No. _____ and was amended on _____.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the Patent Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119, of any foreign applications for patent or inventor's certificate or of any PCT international application designating at least one country other than the United States of America listed below and have also identified below any foreign application for patent or inventor's certificate or any PCT international application designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application of which priority is claimed:

Prior Foreign Applications

Priority Claimed

<u>Not Known</u>	<u>Canada</u>	<u>14 September, 1999</u>	<u>xx</u>	
<u>Number</u>	<u>Country</u>	<u>Day/Month/Year filed</u>	<u>Yes</u>	<u>No</u>

I hereby appoint the following attorneys and/or agents to prosecute this application and to transact all business in the United States Patent and Trademark Office connected therewith: Bruce E. O'Connor, Reg. No. 24,849; Lee E. Johnson, Reg. No. 22,946; Gary S. Kindness, Reg. No. 22,178; James W. Anable, Reg. No. 26,827; James R. Uhler, Reg. No. 25,096; Jerald E. Nagae, Reg. No. 29,418; Thomas F. Broderick, Reg. No. 31,332; Dennis K. Shelton, Reg. No. 26,997; Jeffrey M. Sakoi, Reg. No. 32,059; Ward Brown, Reg. No. 28,400; Robert J. Carlson, Reg. No. 35,472; Marcia S. Kelbon, Reg. No.

Declaration for application 2

34,358; Paul L. Gardner, Reg. No. 22,372; and the firm of Christensen, O'Connor, Johnson & Kindness^{PLLC} and Anthony R. Lambert, regn. no. 32,813.

Address all telephone calls to Marcia S. Kelbon at telephone No. (206)682-8100.

Address all correspondence to:

CHRISTENSEN, O'CONNOR, JOHNSON & KINDNESS^{PLLC}
1420 Fifth Avenue, Suite 2800
Seattle, WA 98101-2347

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that wilful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such wilful false statements may jeopardize the validity of the application or any patent issued thereon.

Fred Harmat

FULL NAME OF SOLE/FIRST INVENTOR

F. Harmat

INVENTOR'S SIGNATURE

20-Sept-99

DATE

Edmonton, Alberta, Canada

RESIDENCE

Canadian

CITIZENSHIP

1200 Potter Greens Drive NW, Edmonton, Alberta, T5T 5Y5, Canada
POST OFFICE ADDRESS

Graeme Van Dongen

FULL NAME OF JOINT/SECOND INVENTOR

Graeme Van Dongen

INVENTOR'S SIGNATURE

20 SEPT. 99

DATE

Edmonton, Alberta, Canada

RESIDENCE

Canadian

CITIZENSHIP

#804, 10125 - 109 Street, Edmonton, Alberta, T5J 3P1, Canada
POST OFFICE ADDRESS